

H 16i P

Compactor with padfoot drum


Compactors Series H / Series H267









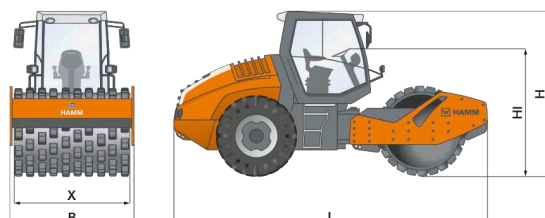

HIGHLIGHTS H

- > 3-point articulation for outstanding traction and off-road mobility
- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Excellent view of the machine and the construction site
- > High compaction performance thanks to high line load and big amplitudes

Machine dimensions		
Total length (L)	mm	6061
Width (B)	mm	2314
Total height (H)	mm	3034
Drum width (X)	mm	2140
Height loading, min. (Hl)	mm	2308



EU Stage V /
EPA Tier 4

TECHNICAL DATA		Unit	H 16i P
	Weights		
	Operating weight with cab	kg	16890
	Operating weight with ROPS	kg	16700
	Basic weight no cab, without ROPS	kg	16235
	Operating weight, max.	kg	18420
	Axle load, front/rear	kg	10955/5935
	French classific., data/class		74,7/VPM5
	Load per tyre, rear	kg	2967,5
	Machine dimensions		
	Total length	mm	6061
	Total height with cab	mm	3034
	Total height with ROPS	mm	2985
	Height loading, min.	mm	2308
	Wheel base	mm	3149
	Total width with cab	mm	2314
	Max. working width	mm	2140
	Ground clearance, centre	mm	390
	Kerb clearance, left/right	mm	510/510
	Turning radius, inside	mm	3870
	Angle of driving slope, front/rear	°	53/32
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1674
	Drum thickness, front	mm	30
	Drum type, front		Padfoot
	Height of the padfeet	mm	100
	Padfeet, number		140
	Wheel dimensions		
	Size of tyres, rear		TR 23.1-26 12 PR
	Width over tyres, rear	mm	2160
	Number of tyres, rear		2
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 4.1 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		115,0/156,4/2300
	Power rating SAE J1349, kW/HP/rpm		115,0/154,1/2300
	Emission standard		EU Stage V / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF-SCR
	Drive		
	Speed, infinitely variable	km/h	0 - 10,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	56/61
	Vibration		
	Vibration frequency, front, I/II	Hz	28/31
	Amplitude, front, I/II	mm	2,13/1,37
	Centrifugal force, front, I/II	kN	328/259
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	290
	AdBlue/DEF tank, content	L	32
	Sound level		
	Acoustic power LW(A), sticker	db(A)	105
	Acoustic power LW(A), measured	db(A)	104

EQUIPMENT

12 V sockets (double), 2 large working and rear view mirrors, 3-point articulation, Storage bin, lockable, Dashboard with displays, indicator lights and function key, Operating concept Easy Drive, ECO mode, Speed preselect, Hose protection on front vehicle, Vibration-isolated operator's platform, Automatic vibration system

OPTIONAL EQUIPMENT

Working lights, Dashboard cover, ROPS cabin with heating and air conditioning, FOPS-approved (level I), Back-up alarm (reversing), Tool kit, Tachograph, Fire extinguisher, HCQ Navigator, Automatic engine-off function, Radio, Rotating beacon, Protective roof, Dozer blade, HCQ compaction meter

HAMM AG

Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu



HAMM