

Advanced - Cold milling machine for economical applications

COLD MILLING MACHINE W 195 (i)



ADVANCED - COLD MILLING MACHINE FOR ECONOMICAL APPLICATIONS

Two-meter front loader in tried-and-tested design for efficient milling operations.

The machine is suitable for all milling applications typical of the two-meter class.

High daily production rates can be achieved thanks to an exceptionally simple and reliable operating concept.

Optimized weight and advanced machine technology ensure high flexibility in operation.

The cold milling machine is exceptionally cost-effective thanks to low diesel consumption and tool use.



WIRTGEN COLD MILLING MACHINES



SMALL MILLING MACHINES

- > Milling width to 1,300 mm
- > Milling depth to 300 mm

COMPACT MILLING MACHINES

- > Milling width to 1,900 mm
- > Milling width to 330 mm

LARGE MILLING MACHINES

- > Milling width to 4,400 mm
- > Milling width to 350 mm

OVERVIEW OF HIGHLIGHTS

Perfectly Equipped

HIGHLIGHTS IN OPERATION

01 Ease of Operation

- > Clearly structured controls including control screen of robust design
- > Ergonomically designed multifunctional joystick
- > Canopy for increased operator comfort
- > Ideal arrangement of working lights for perfect visibility during night operations

02 Maximum Precision Guaranteed by LEVEL PRO PLUS

- > Maximum precision for a high degree of evenness
- > Simple, intuitive handling
- > Fully integrated into the machine management system
- > Large choice of sensors
- > New hydraulic cylinders at the side plates with integrated displacement sensors

03 Ease of Maintenance

- > Readily accessible points of servicing
- > Extended service intervals for increased cost-efficiency
- > Simple, user-friendly machine diagnostics visualized on display screen
- > Convenient access including "Welcome" and "Go home" lights feature



HIGHLIGHTS IN DRIVING AND STEERING

04 Reduced Diesel Consumption for Increased Efficiency

- > State-of-the-art engine technology for low Diesel consumption
- > Automatic engine speed management
- > Clear visualization of Diesel consumption on display screen
- > Fan speed governed by engine load

05 Excellent Manoeuvrability and Mobility on Site

- > ISC electronic traction control
- > Track speed governed by steering angle
- > Quick-steering feature for high maneuverability in operation
- > Steering angle sensors integrated in hydraulic cylinders

HIGHLIGHTS IN MILLING AND LOADING

06 Heavy-Duty Milling Drum

- > Ejectors suitable for multiple use
- > Durable cutting tools
- > Extremely hard-wearing **HT22** quick-change toolholder system

07 Milling Drum Unit Featuring State-of-the-Art Cutting Technology

- > Heavy-duty scraper with highly durable carbide blades
- > Right-hand side plate lift of 450 mm
- > Drum turning device for cutting tool replacement
- > Milling drum housing manufactured from highly wear-resistant steel

08 Wide, Fast Loading Conveyor for Maximum Loading Capacity

- > Conveyor capacity matches increased milling performance
- > Continuously adjustable belt speed including automatic switching feature
- > Extremely wide conveyor slewing angles of 60° to the left and right
- > Hydraulically folding discharge conveyor



HIGHLIGHTS IN PERFORMANCE AND PRODUCTIVITY

09 Effective Milling Performance

- > Exceptionally efficient weight-to-performance ratio
- > Selectable milling drum speeds
- > New machine management system for maximum, efficient machine utilization
- > Automated feature initiating the milling process allows quick lowering of drum into the milling cut

10 Significant Reduction of Tool Cost

- > New "Delta18" milling drum technology for low cutting tool wear
- > Injection of water into the milling drum unit is governed by milling output
- > Optimized tool arrangement on the milling drum edge rings for reduced tool wear

HIGHLIGHTS IN OPERATION

01 Multifunctional Joystick

Ergonomically designed multifunctional joystick with driving, steering, selecting operating mode, raising machine and switching off conveyor features.

02 Clearly Arranged Controls

The robust, easy-to-handle controls are arranged in a clear pattern and in line with application requirements. The weatherproof control screen provides clear information on all relevant data and operational parameters.

03 Fully Integrated Leveling System

Full integration of the **LEVEL PRO PLUS** leveling system into the machine management system provides for a high degree of automation.

04 Intuitive Leveling


The new **LEVEL PRO PLUS** leveling system offers intuitive, easy operation.

05 High-Precision Leveling System

The new **LEVEL PRO PLUS** leveling system achieves unprecedented evenness values.

06 Hydraulic Cylinders Integrated in Side Plates

The reference line is scanned by high-precision displacement sensors integrated in the hydraulic side plate cylinders and then displayed on the high-resolution **LEVEL PRO PLUS** control screen.

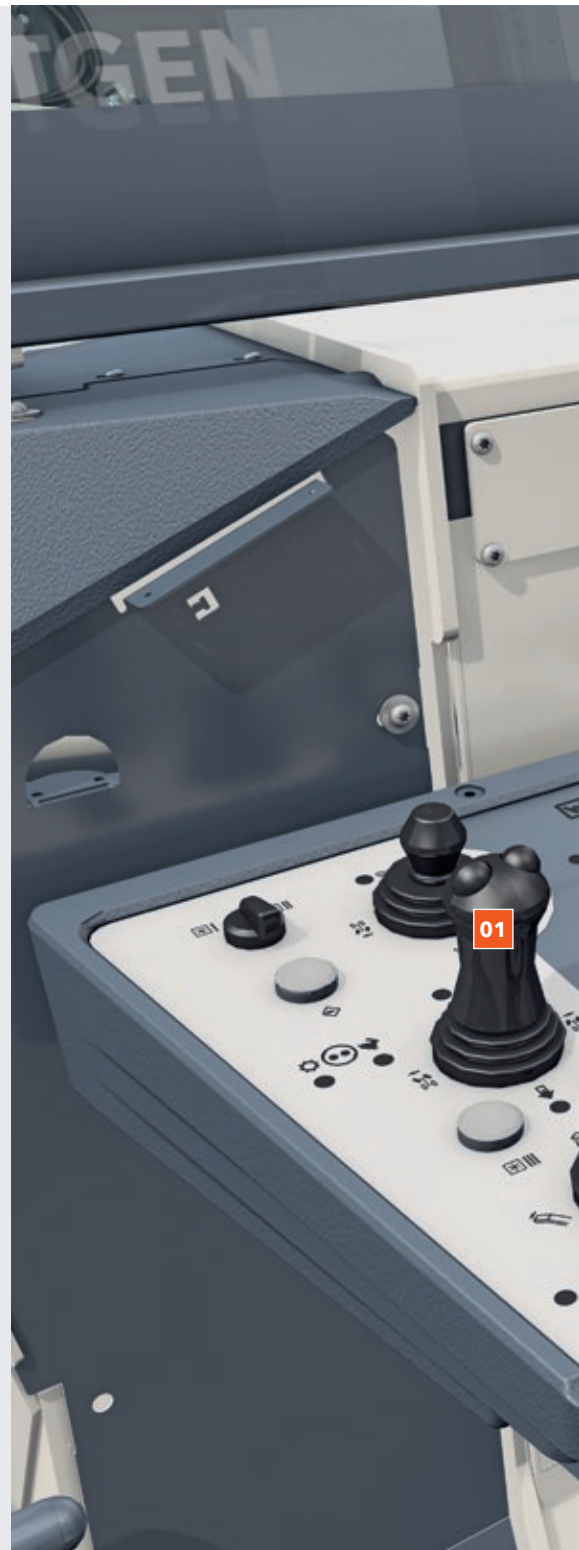

Always Makes the Grade
LEVEL PRO *PLUS*

Maximum Machine Control
Intuitive operating concept



HIGHLIGHTS IN OPERATION

Job Data

Pertinent job details are provided automatically to allow the visualization of daily performance rates.

"Welcome" and "Go Home" Lights Feature

The access ladder and operator's platform are fully illuminated when approaching or walking away from the machine.

Large Choice of Sensors

State-of-the-art CAN-bus leveling technology including sensors suitable for versatile use.

Canopy

The canopy features telescoping side panels on the left and right to allow maximum weather protection in all working situations.

Readily Accessible Points of Maintenance

All points of maintenance and inspection have been grouped together in a few locations and offer ready access to enable quick and easy completion of the maintenance procedures.

Detailed Machine Diagnostics

Numerous options to perform machine diagnostics via the display screen enable thorough testing of the different machine functions.

Extended Servicing Intervals

Extended servicing intervals minimize costs. The next servicing date is displayed on the control screen.

Perfect Visibility

Numerous intelligently arranged working lights - optionally in LED design - provide perfect visibility during night operations.

Control display and **LEVEL PRO PLUS** leveling system.



Performance under Control

Job data

Precisely Maintain the Milling Depth

Various sensors



HIGHLIGHTS IN DRIVING AND STEERING



01 ISC Traction Control

The intelligent electronic traction control system prevents the slip of individual track units in case of insufficient grip, thus ensuring maximum traction at all times.

02 Steering Angle Sensors

A damage-proof, wear-resistant, maintenance-free system of displacement sensors integrated in the hydraulic cylinders detects the steering angle of the individual track units.



Clearly structured control panel with language-neutral labelling.

03 Easy Pad System

The WIRTGEN Easy Pad System (EPS) enables track pads to be replaced quickly and cost-efficiently.

04 Quick-Steering Feature

An exceptionally quick steering system at the front and rear track units enables tremendous manoeuvrability on site.

05 Advance Speed Governed by Steering Angle

Electronic adjustment of the track speed during cornering ensures maximum traction and low track pad wear.

Readout of Diesel Consumption

The machine's current Diesel consumption can be viewed quickly and reliably on the display screen.

Fan Speed Governed by Engine Load

Continuous adjustment of the fan speed to the engine load results in a further significant reduction of Diesel consumption.

Fuel-Efficient Engine

Automatic idling in case of low engine performance requirements.

Efficient Engine Speed Management

The engine speed is governed in accordance with the activated features, thus minimizing Diesel consumption regardless of the job to be completed.

Switch for Transport Mode

The cold milling machine can be driven out of the milling cut quickly by manually activating a separate switch on the driving lever.

HIGHLIGHTS IN MILLING AND LOADING

Standard Milling Drum LA18



The highly effective WIRTGEN milling drums deliver excellent milling performance.



Durable Cutting Tools

The machine is delivered fitted with exceptionally durable point-attack cutting tools.

Heavy-Duty Scraper with Highly Durable Carbide Blades

Full-carbide scraper blades to maximize pick-up of the milled material.

Ejectors Suitable for Multiple Use


Ejectors on the milling drum suitable for double-sided use and optimized for the intended application.

Milling Drum Turning Device

The hydraulically operated milling drum turning device enables quick, convenient cutting tool replacement.

Heavy-Duty Milling Drum Housing

The milling drum housing has been manufactured from highly wear-resistant steel plates for an extended lifespan.

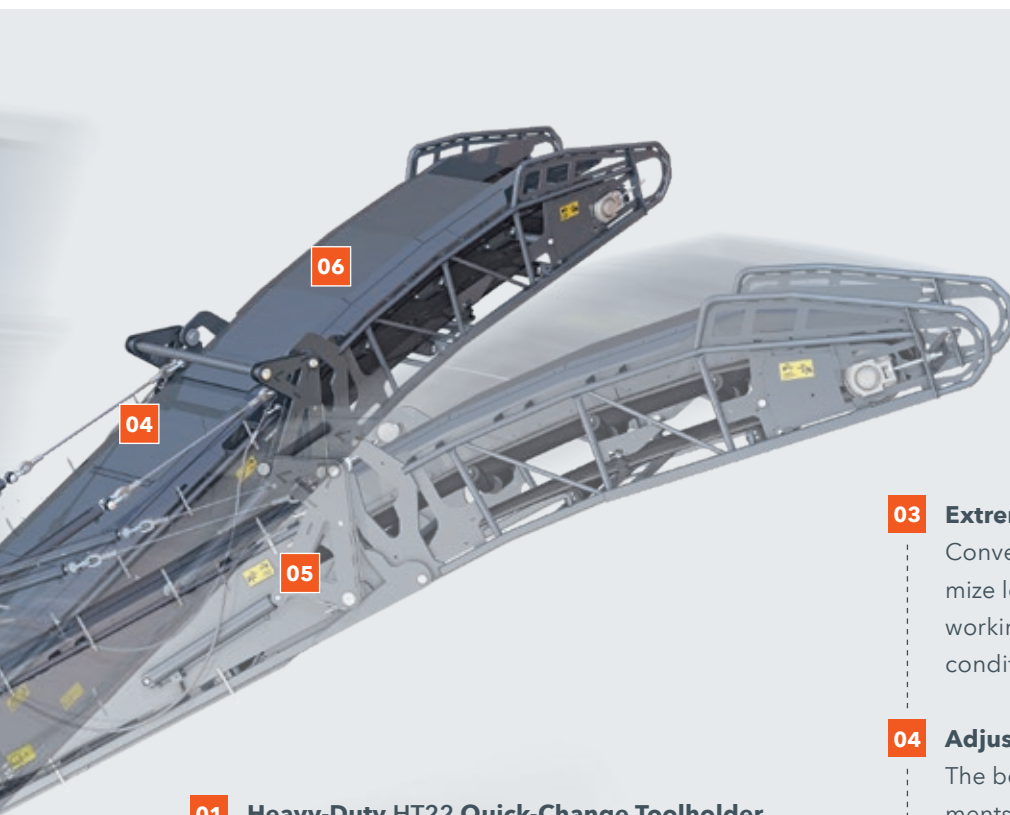

01 Heavy-Duty HT22 Quick-Change Toolholder System

The HT22 quick-change toolholder system has been designed for tough operating conditions and is synonymous with durability, perfect tool rotation and easy tool replacement.

02 Right-Hand Side Plate Lift of 450 mm

Featuring a lift of up to 450 mm, the right-hand side plate enables flush-to-kerb milling even along exceptionally high concrete kerbstones.

03 Extremely Wide Slewing Angle

Conveyor slewing angles of 60° to either side optimize loading of the granulated material even when working at traffic intersections or in restricted space conditions.

04 Adjustable Conveyor Belt Speed

The belt speed can be adjusted in line with requirements: from slow, low-wear operation to maximum loading capacity at high conveying speed.

05 Hydraulically Folding Discharge Conveyor

Conveniently folding discharge conveyor to optimize machine transport length.

06 Exceedingly High Conveyor Capacity

Paired with an increase in conveyor speed, the extra-wide loading conveyor offers tremendous conveying power to load even oversize trucks.



HIGHLIGHTS IN PERFORMANCE AND PRODUCTIVITY

01 Exceptionally Efficient Weight-to-Performance Ratio

Reduced machine weight for ease of transport combined with high engine performance.

02 New "Delta18" Milling Drum Technology

The newly developed, optimized arrangement of cutting tools results in a significant increase in milling power while simultaneously reducing cutting tool wear.

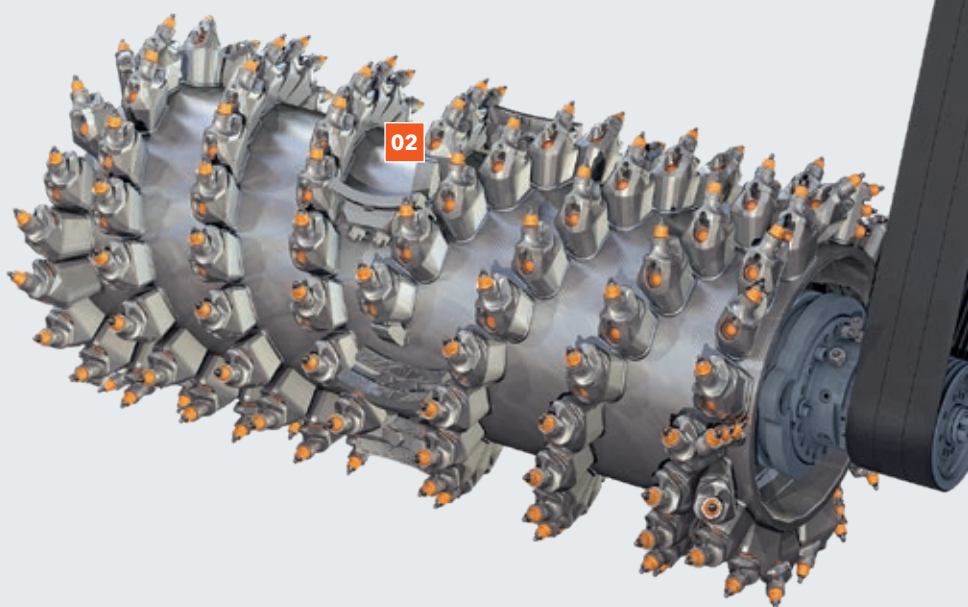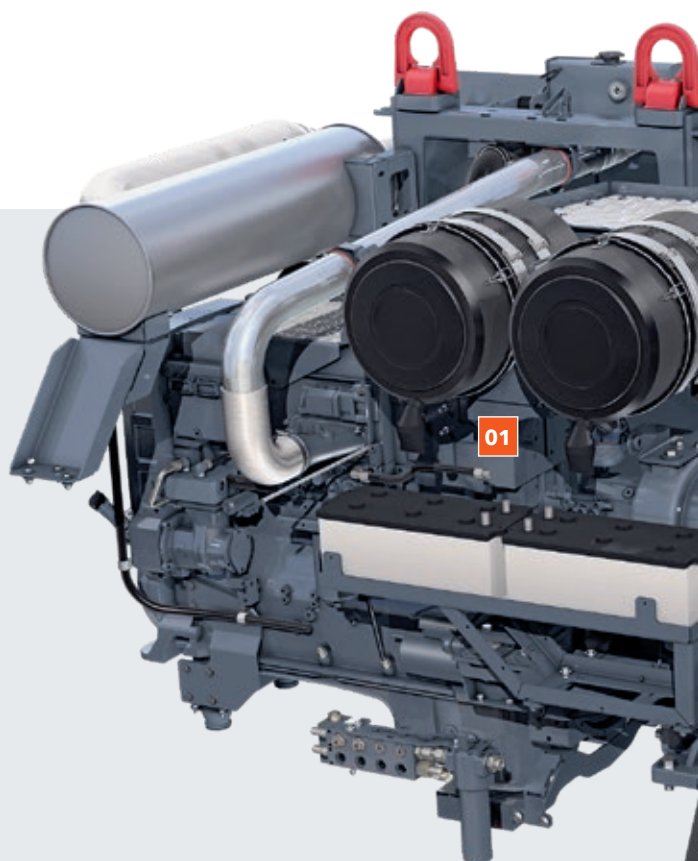

Powerful, Cost-Efficient, and Environmentally Compatible

Three different milling drum speeds

Easy Water Refilling

The water tank is refilled quickly and easily during the milling operation via the water filling port arranged at the rear of the machine.

Optimized Cutting Tool Arrangement

The new, specially designed edge rings are equipped with fewer cutting tools while at the same time producing even more accurate milling edges.

Load-Controlled Water Spray System

The amount of water required to cool the cutting tools and minimize tool wear is injected automatically in accordance with the engine load.

Initiating the Milling Process Quickly and Automatically



Lowering the milling drum into and raising it out of the milling cut quickly and in accordance with the engine load ensures maximum productivity in each single cut.

State-of-the-Art Machine Management System

The cold milling machine features an automated machine management system which has been optimized for high economic efficiency in a wide range of different applications.

Three Selectable Milling Drum Speeds

Three selectable milling drum speeds ensure optimum milling performance across a wide range of applications.

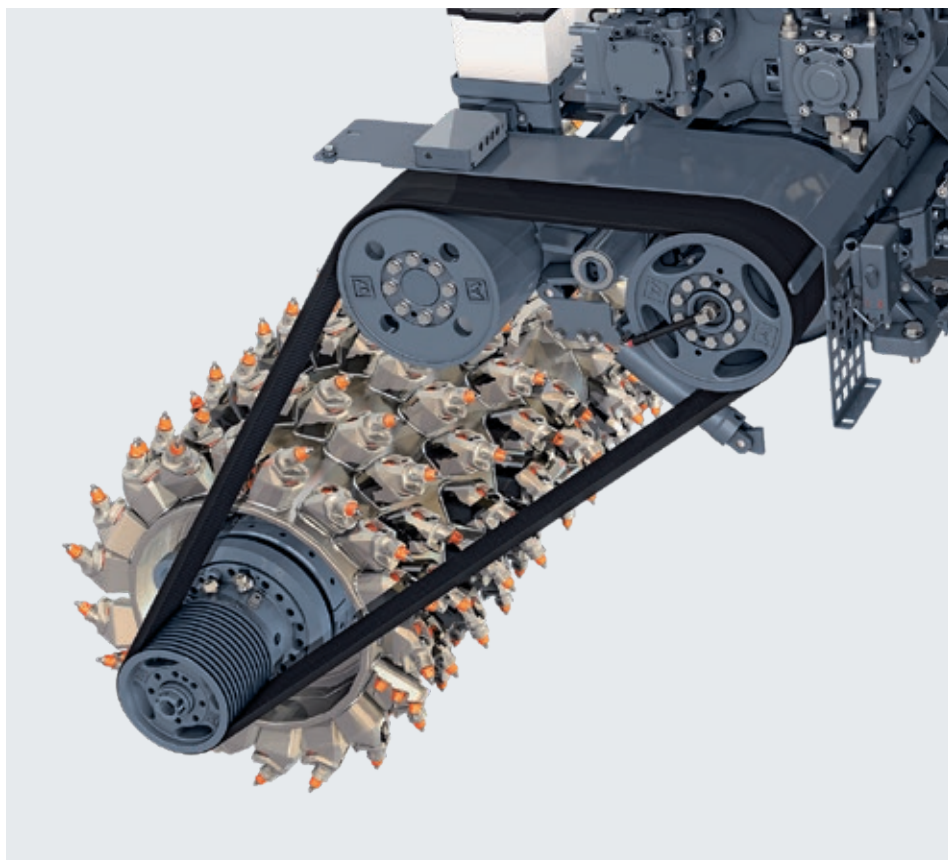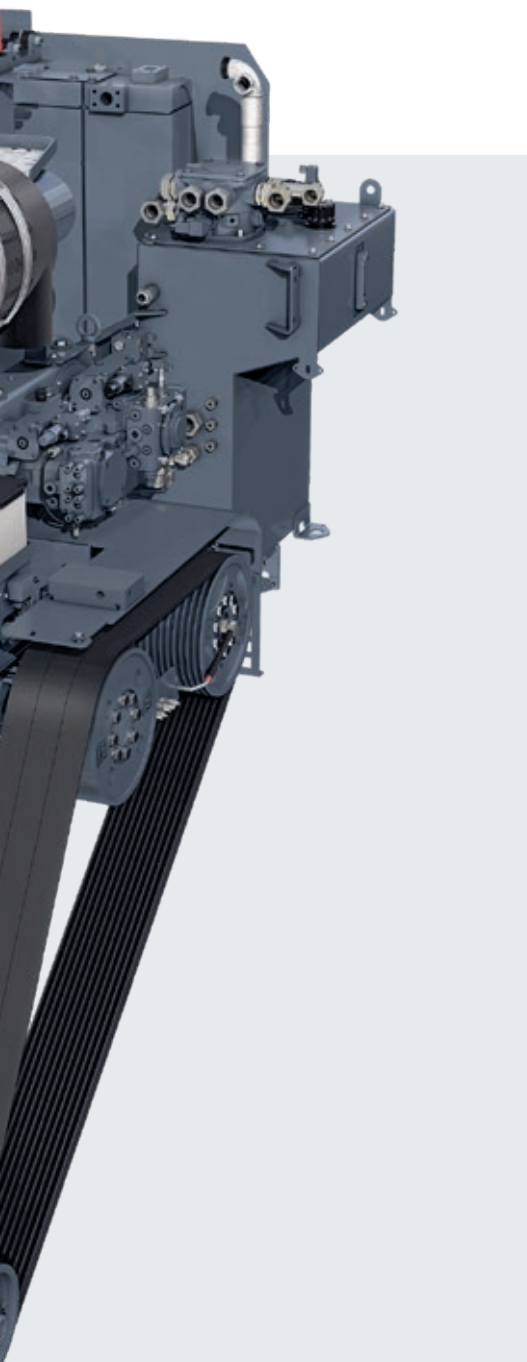

Three milling drum rotation speeds: 104 rpm, 116 rpm and 129 rpm.

Two-meter front loader in tried-and-tested design for efficient milling operations. The machine is suitable for all milling applications typical of the two-meter class. High daily production rates can be achieved thanks to an exceptionally simple and reliable operating concept.



TECHNICAL SPECIFICATIONS	W 195		W 195 i
Milling Drum			
Milling width	2,000 mm		
Milling depth ¹⁾	0 to 330 mm		
Cutting diameter	1,020 mm		
Engine			
Manufacturer	CUMMINS		
Type	QSX15	X15	
Cooling	Water		
Number of cylinders	6		
Rated power at 2,100 rpm	373 kW / 500 hp / 507 PS		
Maximum power at 1,800 rpm	410 kW / 550 hp / 557 PS		
Displacement	15 l		
Fuel consumption at rated power at mix of job site operations	102 l/h 41 l/h	96 l/h 38 l/h	
Emissions standard	EU Stage 3a / US Tier 3, CN Stage 3	CN NR Stage 4	
Electrical System			
Power supply	24 V		
Tank Capacities			
Fuel tank	1,160 l		
AdBlue® / DEF ²⁾	–	100 l	
Hydraulic oil	200 l		
Water	3,280 l		
Driving Performance			
Max. travel and milling speed	0 to 85 m/min (5 km/h)		
Crawler units			
Crawler units, front and rear (L x W x H)	1,630 x 260 x 590 mm		
Loading of Milled Material			
Belt width of primary conveyor	850 mm		
Belt width of discharge conveyor	850 mm		
Theoretical capacity of discharge conveyor	375 m³/h		


TECHNICAL SPECIFICATIONS	W 195	W 195 i
Weight of Basic Machine		
Net weight of machine excluding tank contents	26,810 kg	27,360 kg
Operating weight, CE ³⁾	29,160 kg	29,710 kg
Maximum operating weight (full tanks, full range of equipment)	32,120 kg	32,670 kg
Weight of Tank Contents		
Water	3,280 kg	
Fuel (0.83 kg/l)	960 kg	
AdBlue® / DEF ²⁾ (1.1 kg/l)	–	110 kg
Additional Weight		
Operator and Tools		
> Machine operator	75 kg	
> 5 pick containers	125 kg	
> Vehicle tool kit	30 kg	
Optional Milling Drums Instead of Standard		
> Milling drum FB2000 HT22 PLUS LA8 with 274 picks	680 kg	
> Milling drum FB2000 HT5 LA6X2 with 672 picks	980 kg	
> Milling drum FB2000 HT22 PLUS LA25 with 124 picks	-320 kg	

¹⁾ The maximum milling depth may deviate from the value indicated due to tolerances and wear.

²⁾ AdBlue® is a registered trademark of the German Association of the Automotive Industry (VDA).


³⁾ Machine weight, half-full tanks, vehicle tool kits, machine operator, excluding optional equipment

SIDE VIEW / TOP VIEW W 195(i)

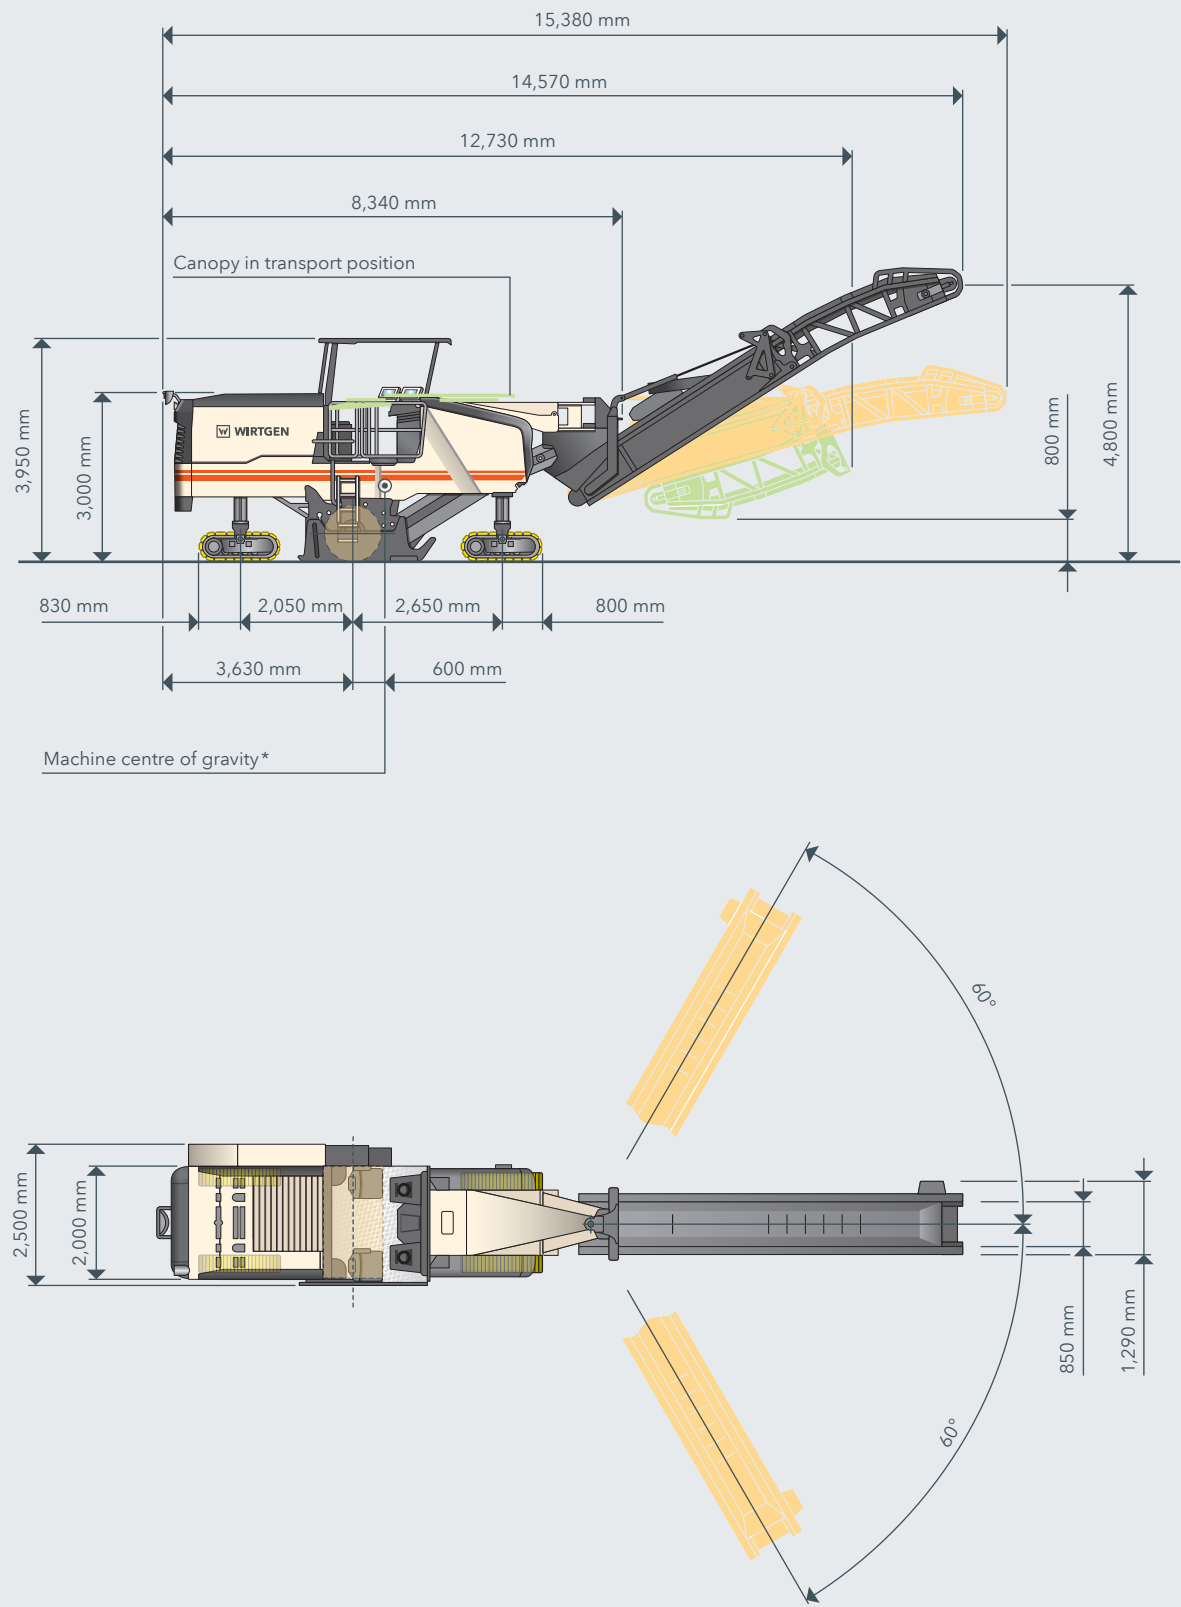

*Based on operating weight, CE with conveyor folded out

MILLING RADIUS W 195 (i), MILLING DEPTH 150 MM

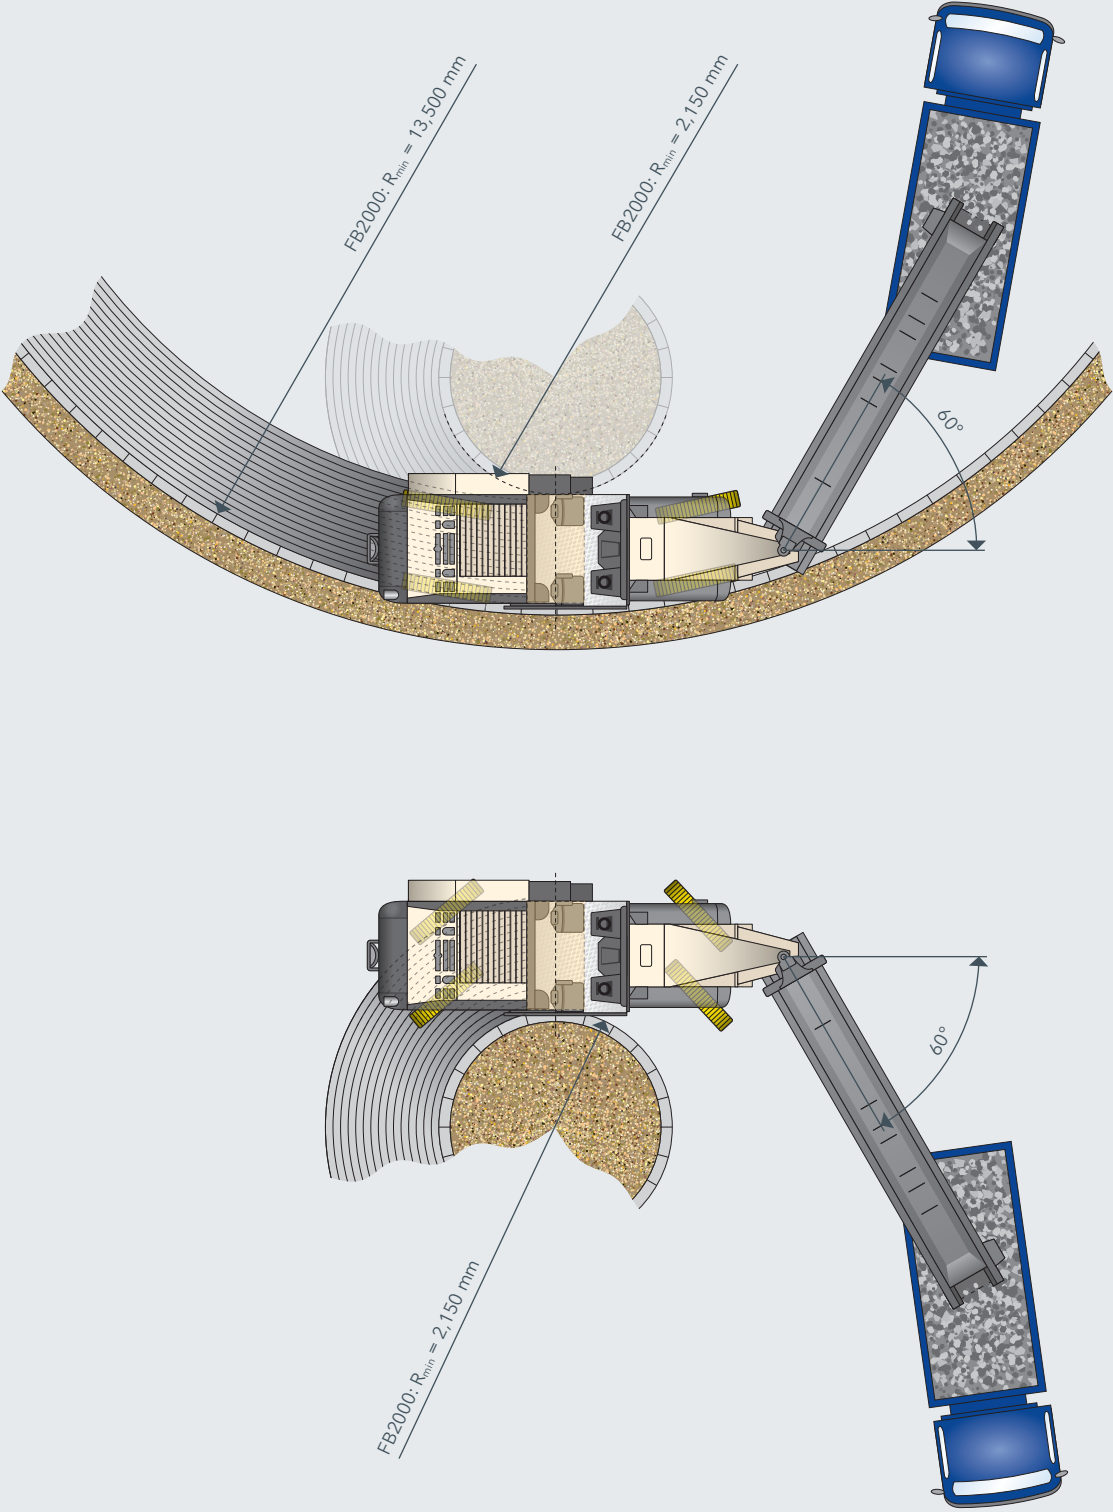

STANDARD EQUIPMENT W 195 (i)**Basic Machine**

> Basic machine with engine	■
> Machine chassis with double-sided wasp waist	■
> Hydraulically opening engine cover with noise insulation	■
> Air compressor system	■
> Battery operated hydraulic unit for engine cover / weather canopy	■
> Cooling system with temperature-controlled fan speed	■

Milling Drum Unit

> Three milling drum rotation speeds with electric on/off function 104 rpm - 116 rpm - 129 rpm	■
> Hydraulic material depressor with conveyor lifting function	■
> Hydraulically adjustable and movable scraper blade with hydraulic locking system	■
> Hydraulically lifting side plate, right clearance 450 mm and left clearance 330 mm	■
> Water sprinkling strip in the milling drum unit	■
> Milling drum housing FB2000	■

Milling Drums

> Milling drum FB2000 HT22 PLUS LA18 with 148 picks	■
--	---

Loading of the Milled Material

> Conveyor belt system with manually or automatically controllable transport speed	■
> Water sprinkling system in the primary conveyor	■
> Discharge conveyor slewing angle left 60 degrees - right 60 degrees	■
> Discharge conveyor, 7,900 mm long, 850 mm wide, with hydraulic folding device	■

Machine Control and Leveling System

> Multi-function control display showing important machine operating conditions	■
> Extensive machine diagnosis in the control display	■
> Milling power control with automatic on/off function	■
> Two exterior panels for operating functions by ground personnel	■
> Milling depth regulation with LEVEL PRO PLUS leveling system, with one operating display as well as one electrical height sensor in the hydraulic cylinder right and left on side plate	■

Operator's Platform

> Operator's stand with complete flexible mounting	■
> Convenient operating panel with practical switches	■
> Convenient footstep to the operator's stand, right and left	■
> Covers for operating panels with lock	■
> Two mirrors front, one mirror middle and one mirror in rear area of the machine	■
> Additional storage compartment on the operator's stand with seating	■
> Weather canopy folds in electrohydraulically	*

STANDARD EQUIPMENT W 195 (i)

Track Unit and Height Adjustment	
> Crawler unit tracks type B1	■
> ISC - intelligent track speed control with hydraulic four chain drive	■
> Freely selectable steering functions for the four-track steering	■
> Extremely wear-resistant, two-piece EPS polyurethane track pads	■
Miscellaneous	
> Storage compartment between the rear crawler units for 4 pick bucket	■
> Lighting package with 10 halogen work lights on the sides of the machine, located near the milling drum unit, on the bonnet and ladder area.	■
> "Welcome" and "Go home" lights feature including LED lighting in the area of the operator's access and platform	■
> USB charging socket 1,000 mA for smartphones, tablets and other electronic devices	■
> Large tool package in lockable tool box	■
> Total of 6 EMERGENCY STOP switches at sensible positions on the machine	■
> Water high-pressure system with automatic on/off function, 18 bar, 67 l/min	■
> Water tank filling from rear of machine	■
> Powerful LED lighting package 24 V with rotary beacons	■
> High-pressure water cleaner, 150 bar 15 l/min	*
> Pneumatic hammer with pick ejector / inserter	*
> Lockable storage space for 4 pick buckets	*

OPTIONAL EQUIPMENT W 195 (i)

Milling Drums	
> Milling drum FB2000 HT22 PLUS LA8 with 274 picks	□
> Milling drum FB2000 HT5 LA6X2 with 672 picks	□
> Milling drum FB2000 HT22 PLUS LA25 with 124 picks	□
Machine Control and Leveling System	
> Slope control sensor	□
> Operating display LEVEL PRO PLUS additionally	□
Miscellaneous	
> Two folding seats for pick change	□

■ = Standard equipment

* = Additional equipment in standard delivery

□ = Optional equipment

**WIRTGEN GmbH**

Reinhard-Wirtgen-Str. 2
53578 Windhagen
Germany

P: +49 2645 131-0
F: +49 2645 131-392
M: info@wirtgen.com

 www.wirtgen.de



For further information, please scan the code.