

A WIRTGEN GROUP COMPANY



KLEEMANN



MC 120 PRO

MOBICAT MOBILE JAW CRUSHER



MOBICAT MC 120 PRO

A guarantee for high production output: MOBICAT MC 120 PRO mobile jaw crusher excels with its extremely robust design and low-maintenance operation.

The plant has a generously dimensioned feeding unit, enabling large quantities of material to be easily fed in with an excavator or wheel loader. Thanks to its powerful crushing unit, the MC 120 PRO ensures the highest possible crushing capacity and high throughput combined with top reliability.



Performance in the foreground




Operability at its easiest



Accessibility at a glance




MOBICAT MC 120 PRO

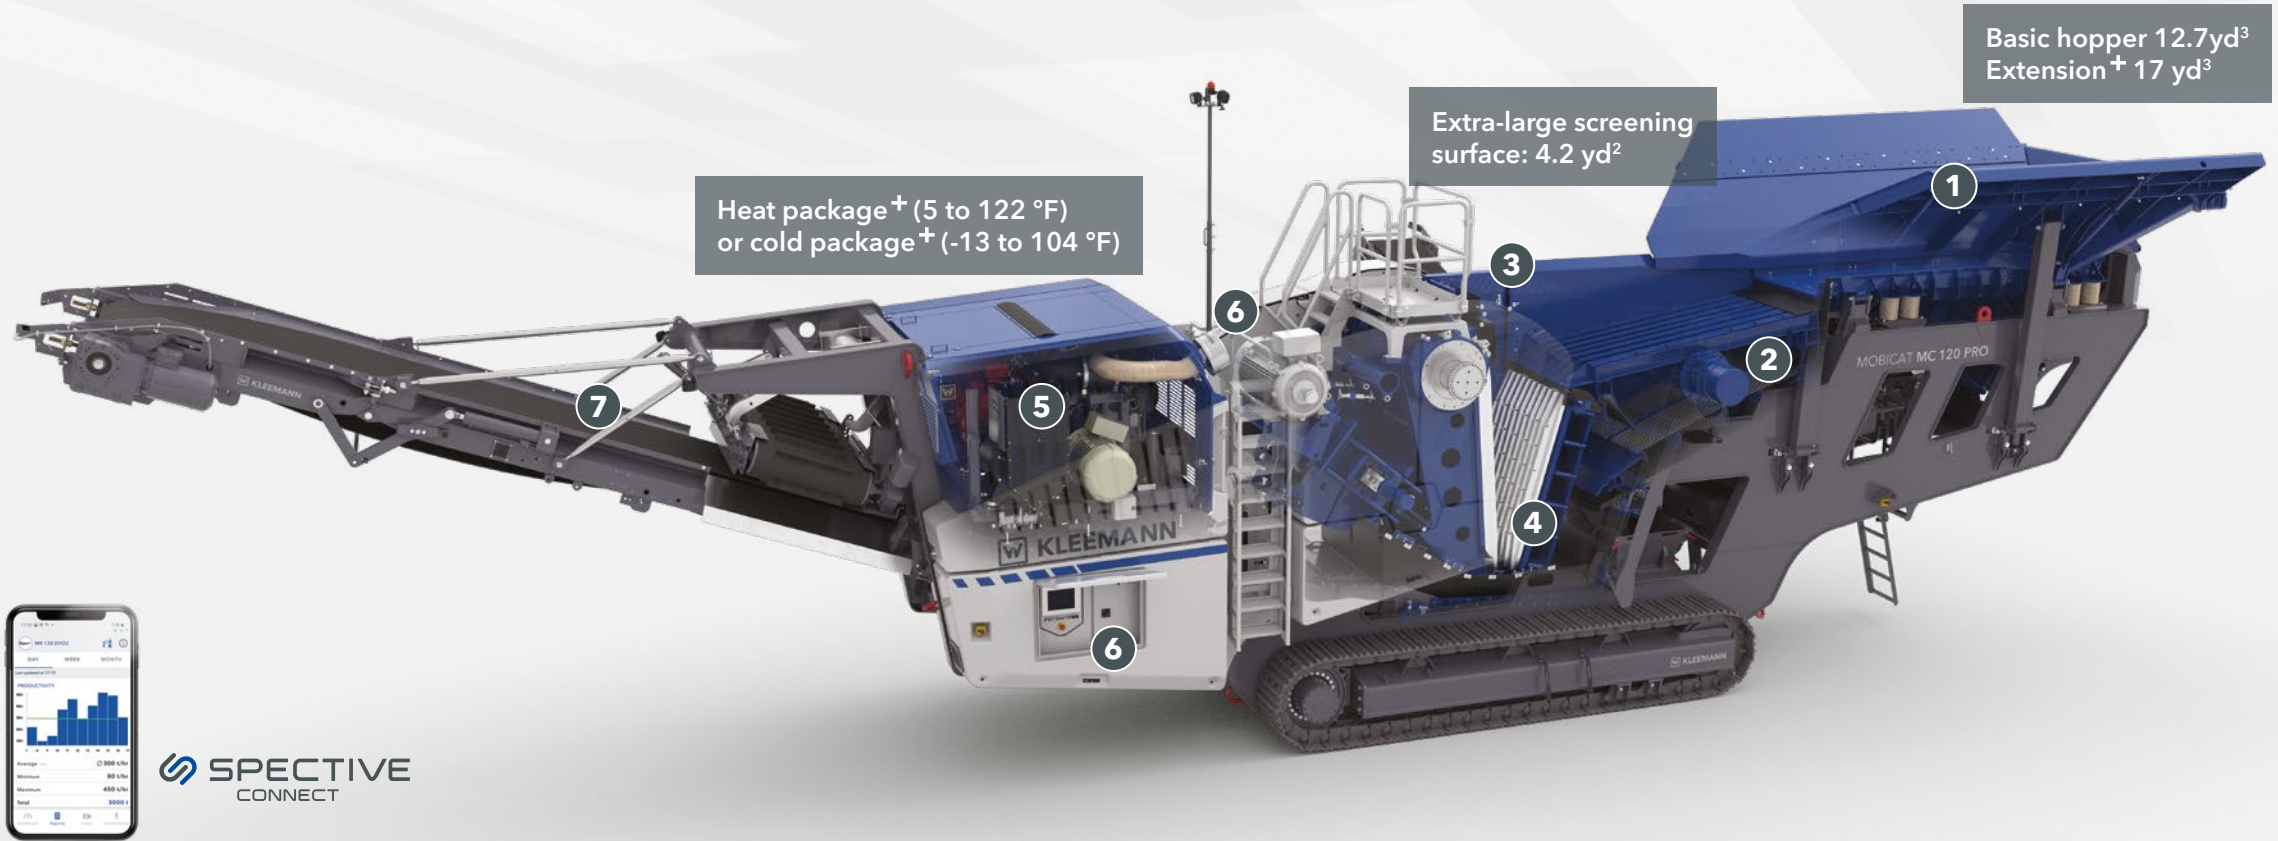

Basic hopper 12.7yd³
Extension⁺ 17 yd³

Heat package⁺ (5 to 122 °F)
or cold package⁺ (-13 to 104 °F)

Extra-large screening
surface: 4.2 yd²



SPECTIVE
CONNECT

1 Feeding unit

4 Crusher unit

7 Crusher discharge conveyor and magnet⁺


2 Prescreening

5 Drive

> Handling and sustainability


3 Continuous Feed System CFS

6 Digital solutions



1 Feeding unit

- > Generously dimensioned basic hopper for simple and fast loading
- > Can be folded hydraulically; self-locking without any additional work - for fast and safe start-up
- > Hopper extension⁺ enables the hopper to be loaded from the side and rear for quick load cycles

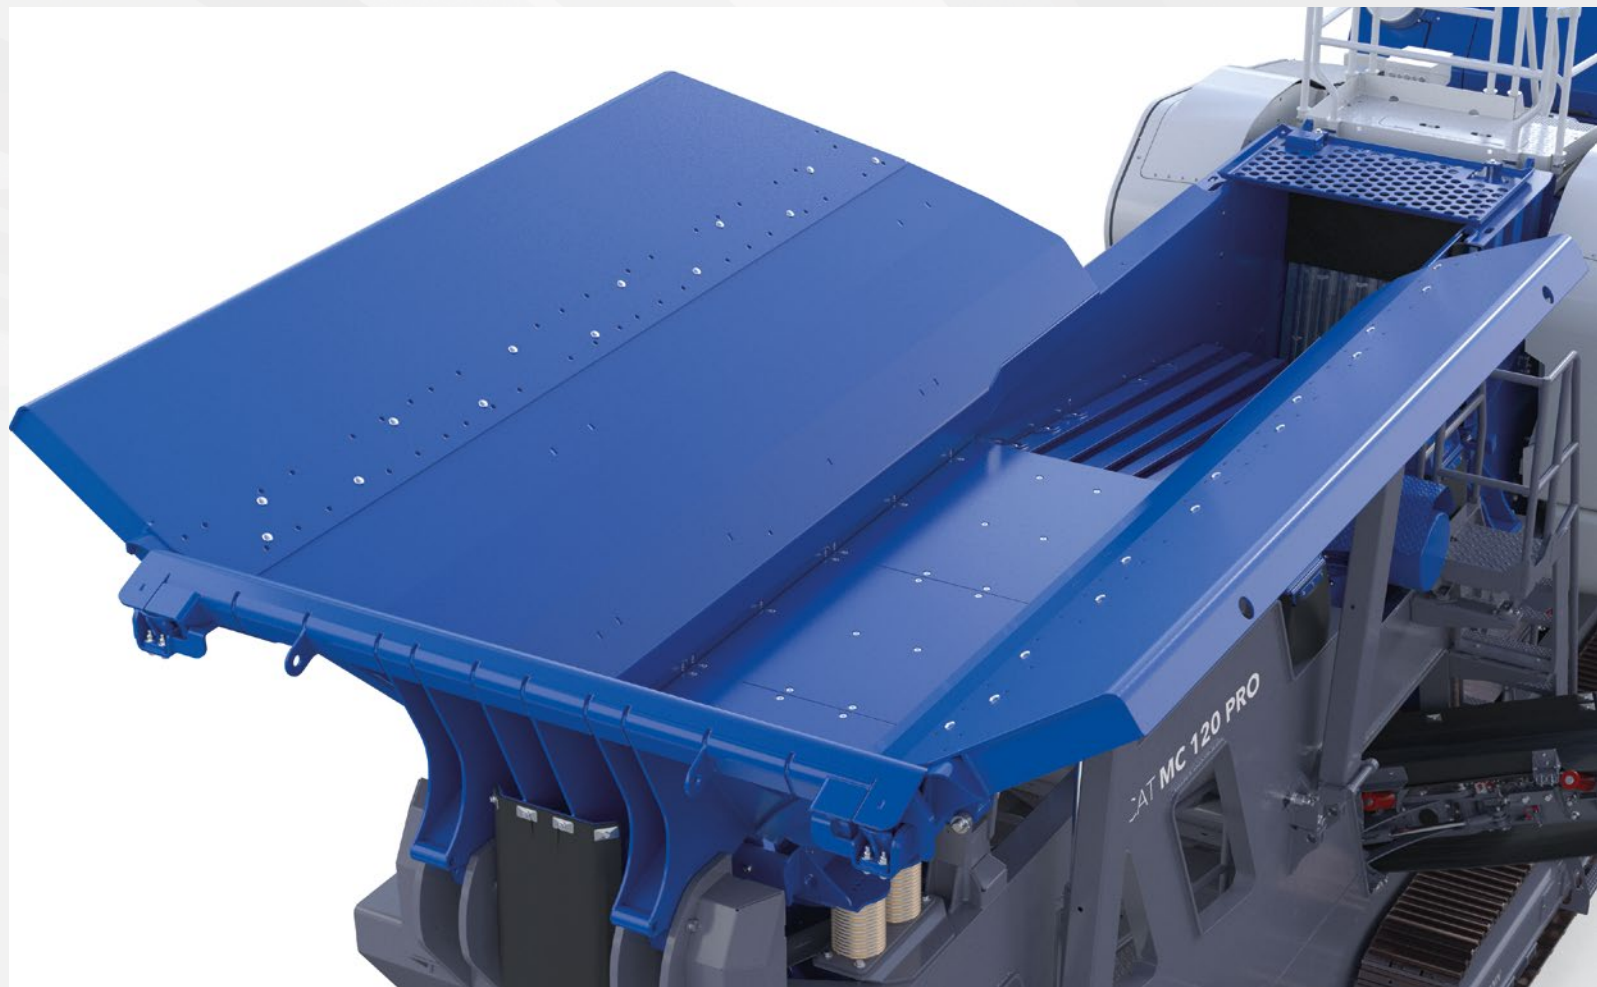

1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions

7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability



2 Prescreening

- > Independent vibrating double-deck prescreen ensures effective screening of the fines while increasing output
- > Easily adjustable bypass flap for optional lateral discharge of the fine grain or diversion into the crusher bypass
- > Side discharge conveyor can be used on both sides, rigid or folded hydraulically



1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions


7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability



3 Continuous Feed System CFS

- > Innovative feed control ensures continuous crusher utilization
- > Vibrating feeder and prescreen automatically restrict or increase the conveying speed depending on the fill level of the crusher. This results in optimal crusher utilization.

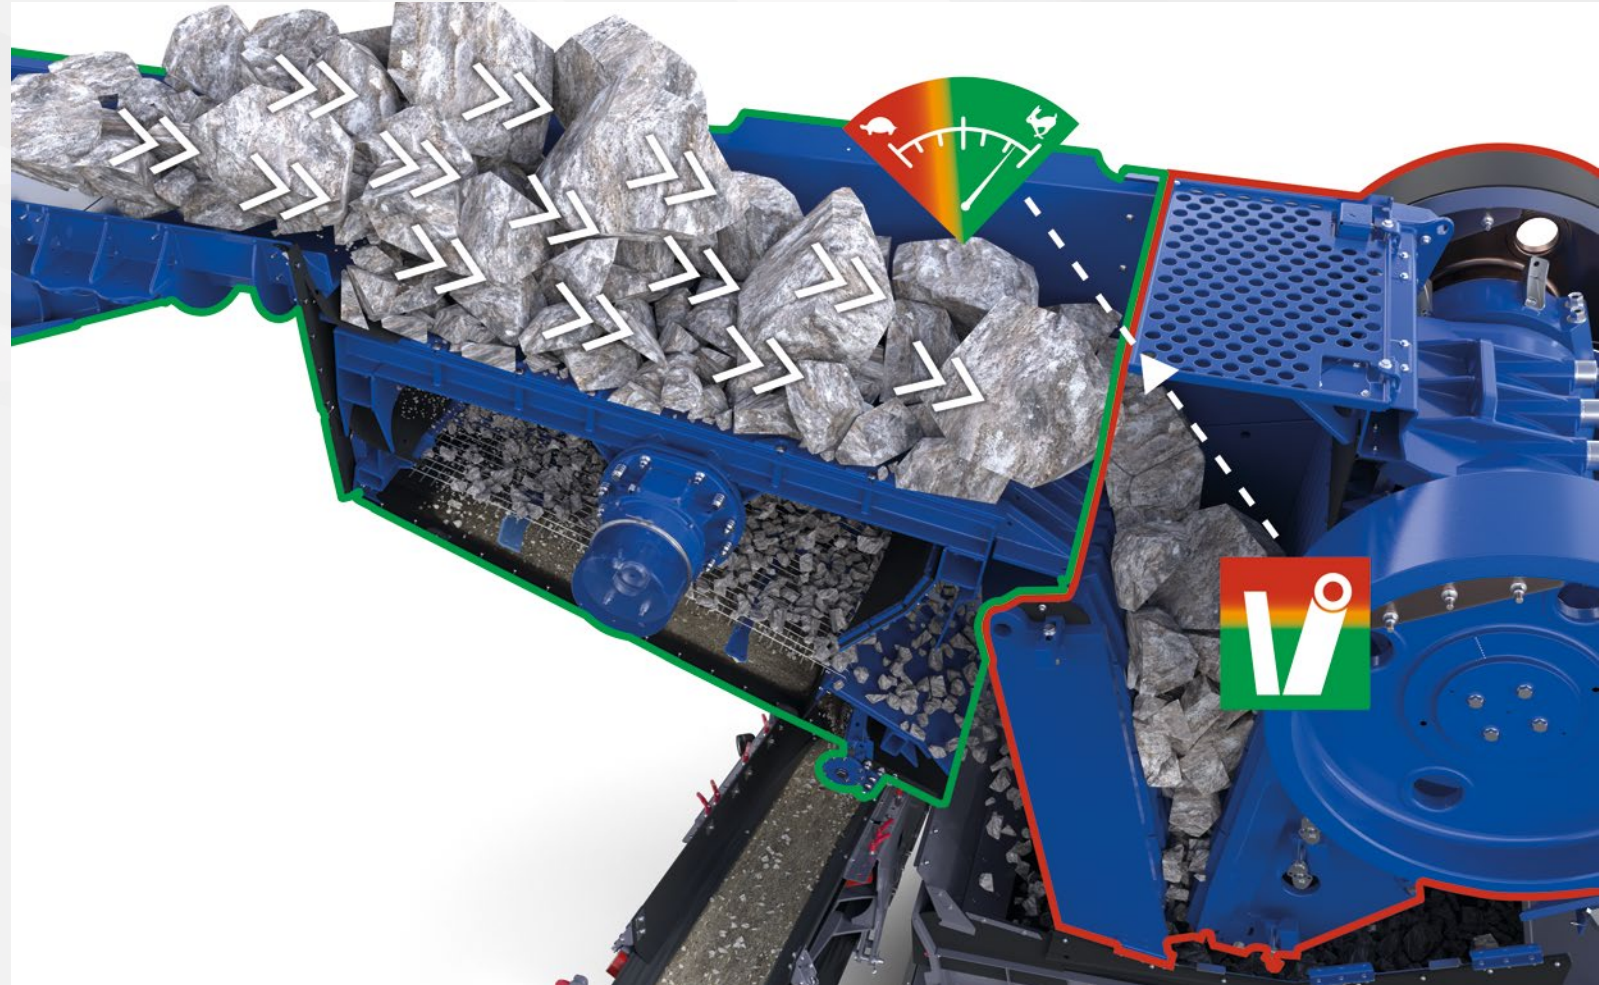

1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS

4 Crusher unit


5 Drive

6 Digital solutions

7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability

⁺ Option




4 Crusher unit

- > Convenient gap setting: at the press of a button over the entire setting range
- > Optimized crusher geometry with long crusher jaw: high throughput combined with top reliability
- > Power crusher drive: Powerful 268 hp electric drive for maximum crushing capacity
- > Crusher unblocking system⁺: for loosening packed material - enables powerful starting even if the crusher is full and at a standstill
- > Gentle material transfer: thanks to deflector plate or crusher discharge chute⁺
- > Rock hammer⁺: for removing material that is stuck, or for crushing lumps of stone

Overload system

LRS load reduction system prevents consequential damage during long operation under extremely high forces

- > The feed volume is adapted and the forces acting on the housing and rocker are reduced
- > When the overload is reduced, the system adapts to the highest possible output

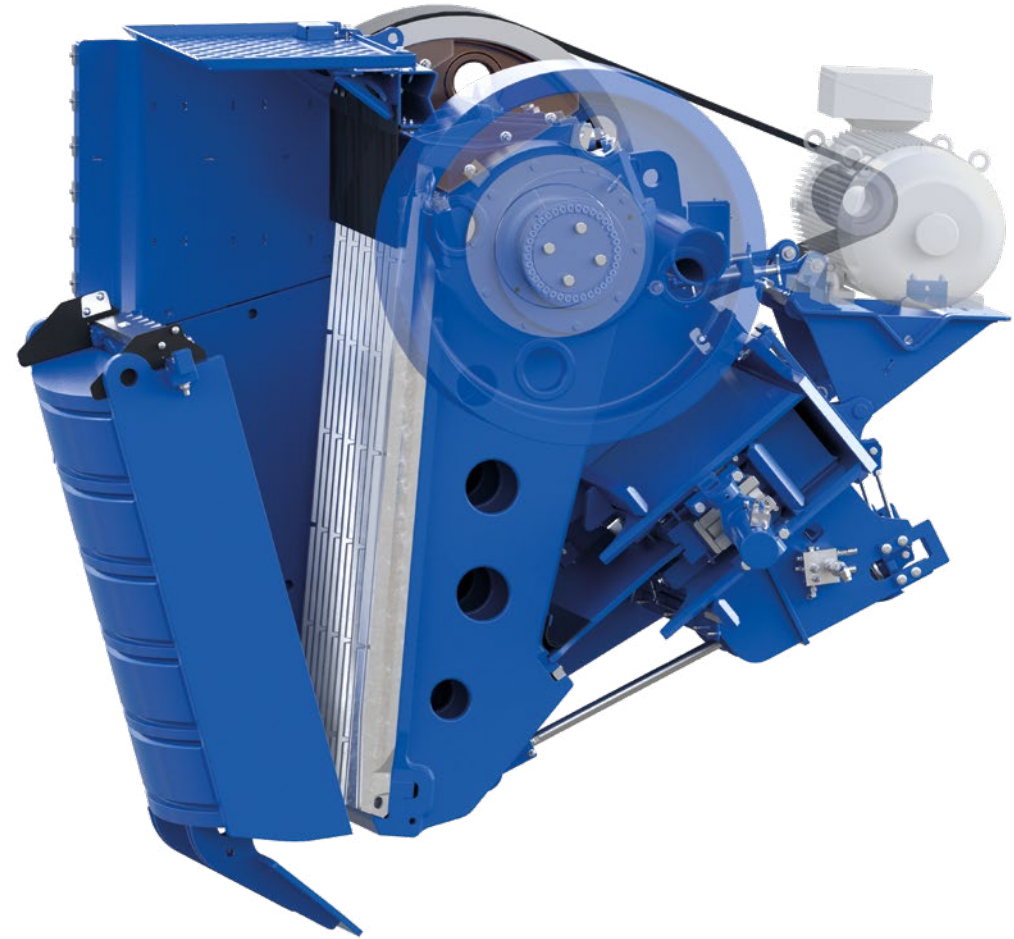

1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions

7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability




5 Drive

- > With the E-DRIVE diesel-electric drive concept, all drives are electric with the exception of the transmission and auxiliary functions
- > Local emission-free operation possible through an external power supply (transportable, depending on the country) for increased sustainability
- > Electrical connection⁺ for the supply of other downstream machines such as a screening plant or stacker
- > Raised air intake⁺ for longer filter service life



KLEEMANN SUSTAINABILITY describes innovative technologies and solutions which are consistent with the sustainability objectives of the WIRTGEN GROUP.

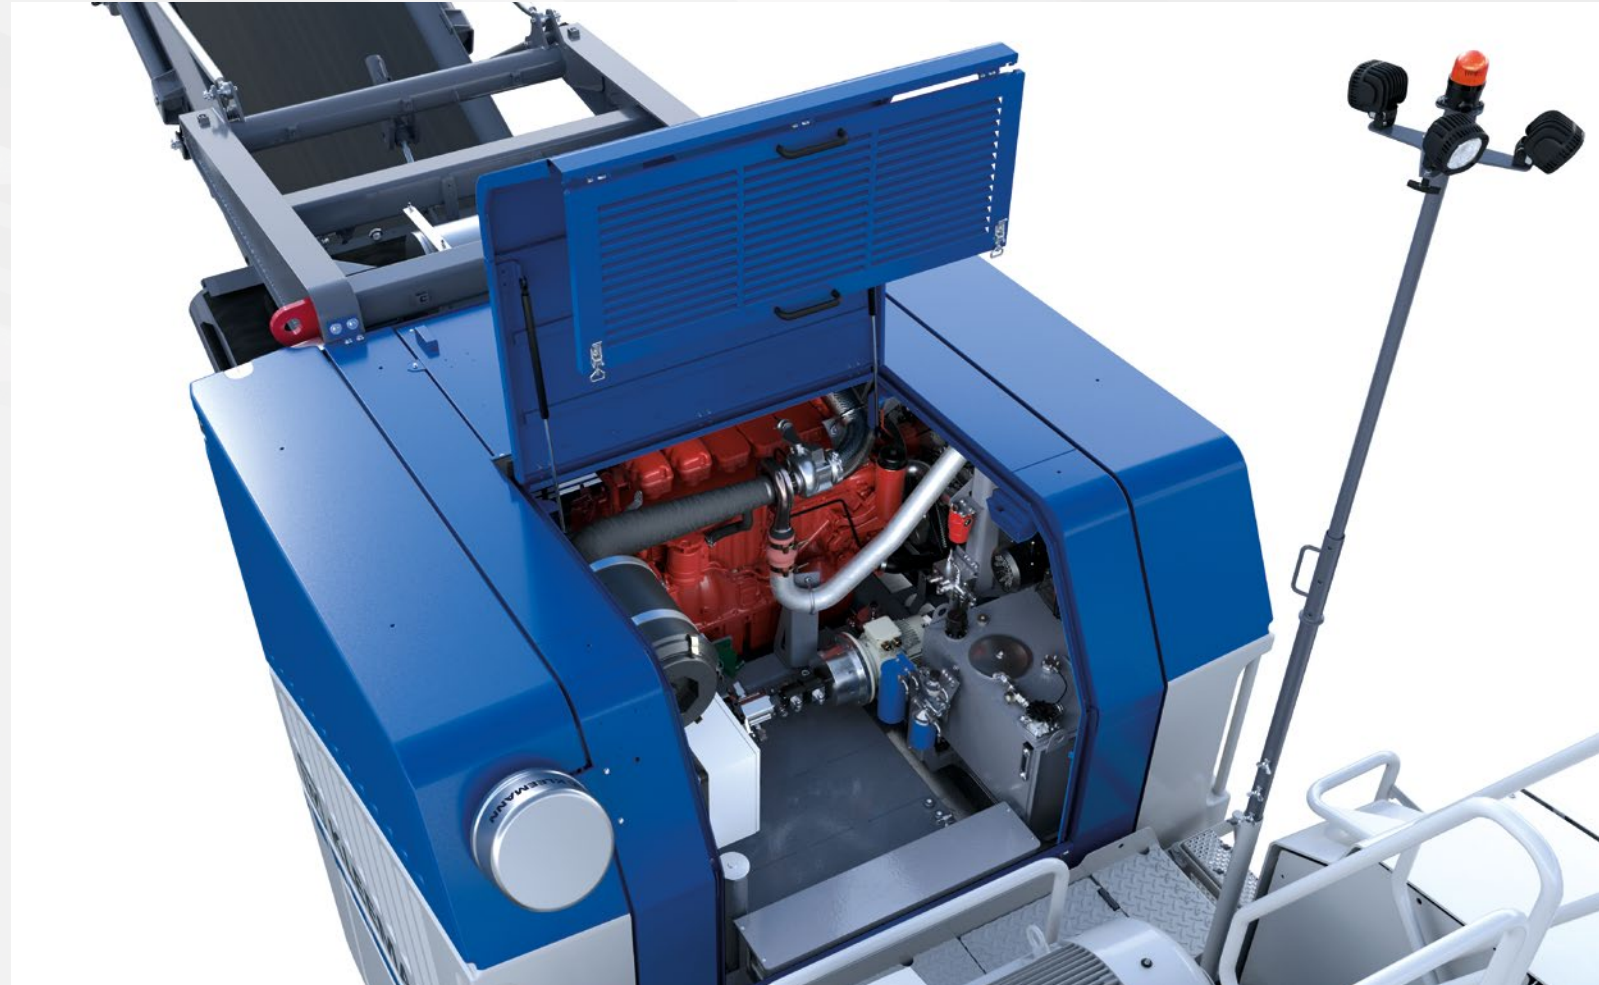

1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions

7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability



6 Digital solutions

- > **SPECTIVE touch panel:** with menu-guided operation, visualization and support; status display of all components such as speed, temperature, etc., rapid fault localization and diagnostics
- > **SPECTIVE CONNECT +:** displays all important information directly on the smartphone
- > **John Deere Operations Center™:** platform for digital solutions for optimizing processes, machines and services - and to simplify maintenance planning
- > **Camera system +:** enables convenient monitoring of crusher and hopper, remote monitor in the excavator, additional connection to SPECTIVE CONNECT
- > **Line coupling:** Process coupling for controlling the production output; safety coupling for reliable linking of the plants in the plant train
- > **Belt scale +:** Determination of the production data for crusher discharge conveyor, WPT Crushing for worldwide live recording of performance data and construction site progress in the John Deere Operations Center™



1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions


7 Crusher discharge conveyor and magnet +

> Handling and sustainability



7 Crusher discharge conveyor and magnet⁺

Crusher discharge conveyor

- > Wide, robust crusher discharge conveyor, discharge height 13' 1"
- > Extended conveyor⁺ with a discharge height of 14' 11", can be hydraulically folded
-  Complete conveyor housing⁺ for dust reduction - can remain on the conveyor for folding

Magnetic separator⁺

- > Electromagnet or permanent magnet
- > Can be raised and lowered hydraulically via remote control



1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS


4 Crusher unit

5 Drive

6 Digital solutions

7 **Crusher discharge conveyor and magnet⁺**

> Handling and sustainability



> Safety & ergonomics

- > Easy physical and visual access to all components enables fast and convenient servicing
- > All hydraulic cylinders are equipped with safety valves (lowering/brake holding valves); each cylinder remains in its current position in the event of shutdown or malfunctioning
- > Simple refuelling from the ground through refuelling pump⁺
- > LED lighting included in basic plant; Premium lighting⁺ for extended illumination of work areas

> Transport

- > Can be quickly switched to the transport position
- > Weight reduction via removal of plant components, e.g. chute and prescreen
- > The foldable side discharge conveyor⁺ and rock hammer⁺ can remain on the machine for transport



> Environment

- > Thanks to the electric drive, hydraulic oil is only required for setting and set-up functions, which reduces the environmental impact and maintenance costs
- > Effective dust reduction thanks to water spray systems at the crusher inlet and crusher discharge conveyor, reduction of dust volume of up to 50% (depending on material)



1 Feeding unit

2 Prescreening

3 Continuous Feed System CFS

4 Crusher unit

5 Drive

6 Digital solutions

7 Crusher discharge conveyor and magnet⁺

> Handling and sustainability

TECHNICAL INFORMATION	MC 120 PRO
Feed capacity up to approx. (US t/h)	717 ¹⁾
Crusher inlet width x depth (inch)	48" x 32"
Max. feed size (inch)	43" x 27" x 17"
Transport height approx. (inch) *	13' 5"
Transport length approx. (inch) *	63' 6"
Transport width approx. (inch) *	9' 10"
Transport weight of basic plant - max. configuration (lbs)	169,800 - 189,600

¹⁾ depending on the type and composition of the feed material, the feed size, prescreening and the final grain size to be achieved
 * without options



WIRTGEN AMERICA

6030 Dana Way
 Antioch, TN 37013
 USA

T: +1 615 501 0600

M: info.america@wirtgen-group.com

 www.wirtgen-group.com/america