

Universal cold milling machine for a wide variety of applications

COLD MILLING MACHINE W 35 XRi



US RELEASE

UNIVERSAL COLD MILLING MACHINE FOR A WIDE VARIETY OF APPLICATIONS



The highly maneuverable cold milling machine is perfect for milling jobs in confined spaces.

The machine's range of applications can be extended through the use of a variety of different milling drums with milling drum housing widths of 14 in (0.35 m) or 20 in (0.5 m).

The machine is also suitable for renovation work in industrial warehouses or parking garages.

The W 35 XRi stands out for its low machine weight with additional weights that can be used as required for optimum ballasting and traction to meet varying requirements.

The **LEVEL PRO PLUS** leveling system fully integrated into the machine control system guarantees high-precision milling results.

WIRTGEN COLD MILLING MACHINES



SMALL MILLING MACHINES

- > Milling width to 4 ft 3 in (1,300 mm)
- > Milling depth to 12 in (300 mm)



COMPACT MILLING MACHINES

- > Milling width to 6 ft 3 in (1,900 mm)
- > Milling depth to 13 in (330 mm)



LARGE MILLING MACHINES

- > Milling width to 14 ft 5 in (4,400 mm)
- > Milling depth to 14 in (350 mm)

OVERVIEW OF HIGHLIGHTS

Perfectly Equipped

01 High-Precision, Intuitive Leveling with LEVEL PRO PLUS

- > High-precision **LEVEL PRO PLUS** leveling system
- > Fast, electronic cross-slope sensor
- > Laser leveling

02 Simple, Ergonomic Operation

- > Variable operator's platform for operation from above or at the rear of the machine
- > Ergonomically designed multifunctional armrest
- > Simple, intuitive operating concept
- > Unobstructed view of the right side plate and important working areas
- > Display for machine parameters



03 Particularly Maneuverable and Compact Machine

- > Excellent maneuverability and minimal milling radii
- > Particularly compact machine dimensions
- > Hydraulic steering system for precise steering

04 Precise Steering with High Traction

- > Hydraulic all-wheel drive for excellent traction
- > Precise height adjustment
- > Memory function for height adjustment
- > Electronically controlled travel drive for high-precision milling

05 Flexibility for Different Milling Jobs

- > Wear-resistant HT08 toolholder system
- > Manually raisable side plate on right side
- > High-performance, load-dependent milling drum water sprinkling
- > Milling drum housing for working widths up to 14 in (350 mm) or 20 in (500 mm)
- > Rapid milling drum changes
- > Three different milling drum speeds
- > Milling power control for maximum advance speed

06 Efficient Loading of Milled Material

- > Height-adjustable discharge conveyor that can swing in both directions
- > Hydraulically raisable conveyor mounting
- > Discharge conveyor can be quickly mounted and demounted by only one person



07 High Productivity with Low Environmental Emissions

- > High-performance engine that meets US EPA Tier 4f exhaust emission standard
- > Variable additional weights up to 3,087 lbs (1,400 kg)
- > State-of-the-art WITOS FleetView telematics system for efficient operations
- > Optimally arranged LED work lights

HIGH-PRECISION, INTUITIVE LEVEL PRO *PLUS* LEVELING SYSTEM

When milling it's important to remove the layers of asphalt at the specified depth. WIRTGEN's intuitive **LEVEL PRO *PLUS*** leveling technology can be relied on to precisely maintain the specified milling depth.

High-Precision Leveling System

The **LEVEL PRO *PLUS*** leveling system programmed especially for cold milling machines offers easy and intuitive one-hand operation using the rotary knob, and the menu can be configured as desired. **LEVEL PRO *PLUS*** stands out due to its extremely precise milling results. The leveling system is fully integrated into the machine control system, enabling a high degree of automation.

Fast Cross-Slope Sensor

The fast, electronic RAPID SLOPE cross-slope sensor ensures that the cross-slope profile is extremely precise. The cross-slope sensor makes it possible to work significantly faster while maintaining the same leveling quality.

Laser Leveling

Laser sensors on the machine work in conjunction with a stationary rotating laser that creates a virtual reference surface. The extremely accurate height measurement via laser sensors is suitable, for example, for indoor milling work. Rotating lasers are not included in our delivery range.

Always Makes the Grade
LEVEL PRO *PLUS*

Precise Cross-Slope Profiling
RAPID SLOPE

01




01 LEVEL PRO **PLUS** is synonymous with perfect leveling quality at high operating speeds.


02 The LEVEL PRO **PLUS** leveling system uses a variety of different sensors.

03 The pre-fitting equipment for laser leveling makes it possible to use laser receivers in combination with an external rotating laser. Laser leveling requires LEVEL PRO **PLUS** to be installed on the machine.

02

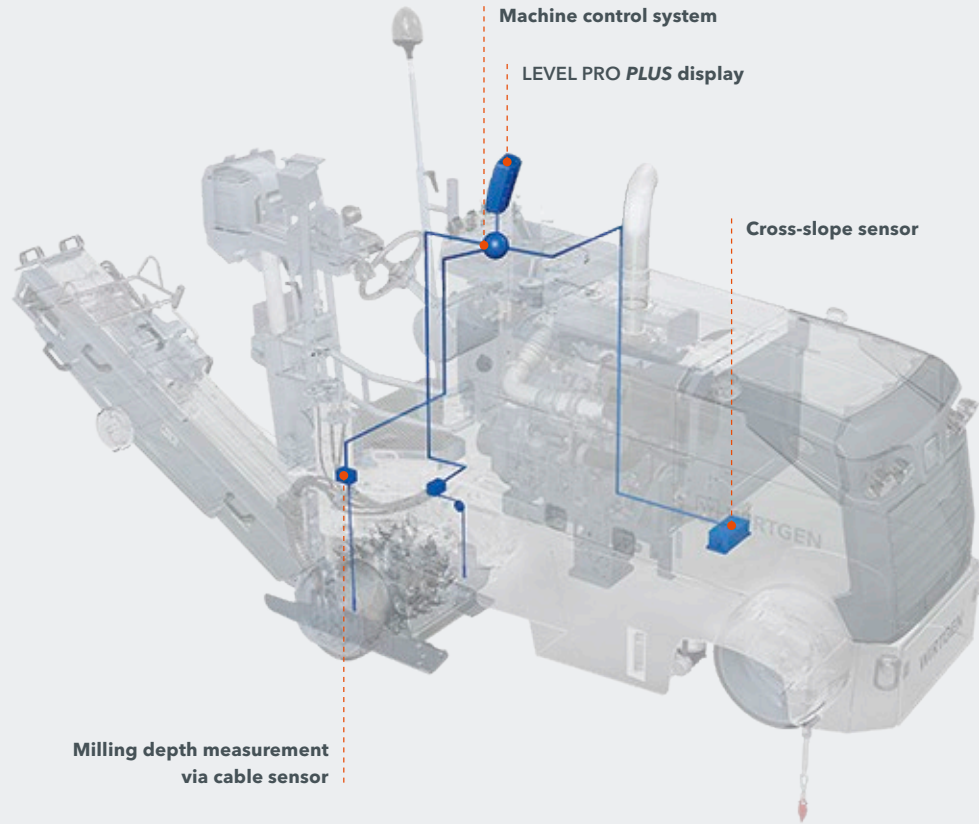

03

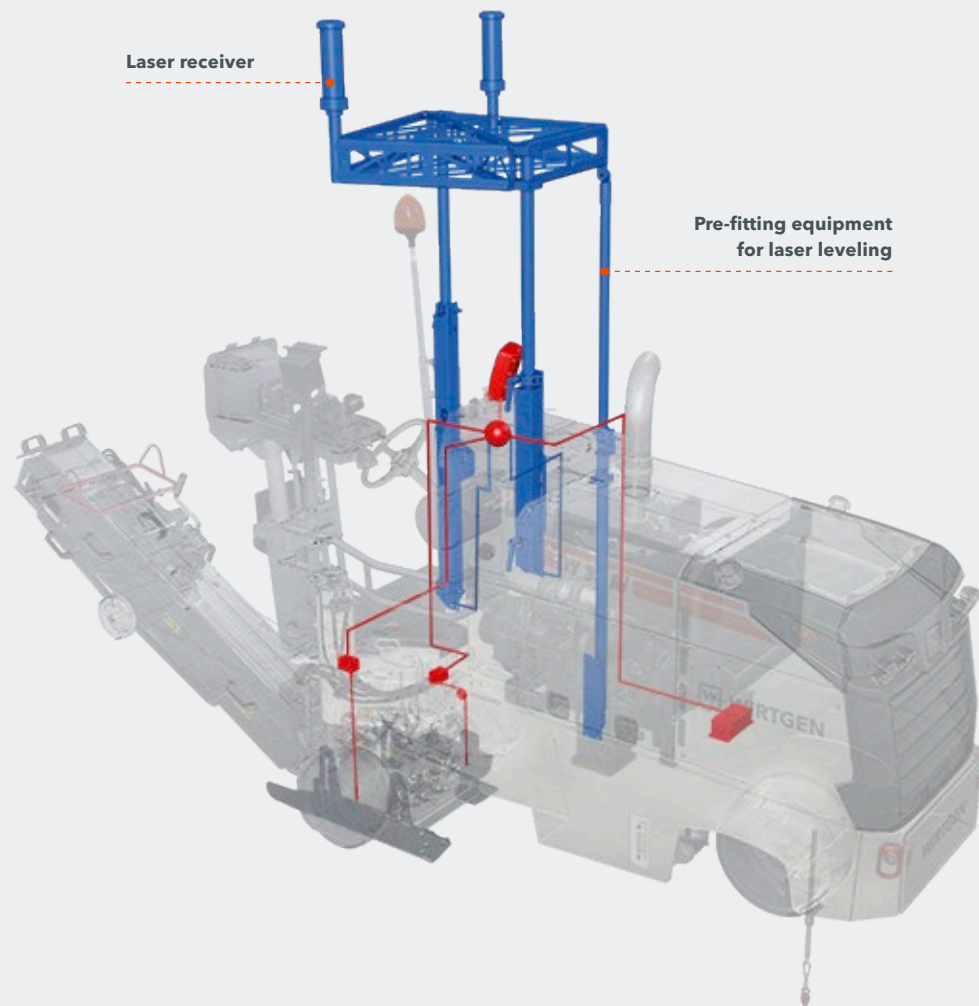

SIMPLE, ERGONOMIC OPERATION

The effortless operation of the W 35 XRi is also perfectly integrated into the standardized operating concept of WIRTGEN's entire range of small milling machines, guaranteeing productive operation right from the start.

Variable Operator's Platform

For universal, ergonomic operation, the operator can choose to operate the small milling machine from above or from the rear of the machine. The operator can quickly and easily switch to the respective position on the job site.

Ergonomic Multifunctional Armrest

The individually adjustable armrest with multifunctional joystick guarantees fast, ergonomic operation.

Intuitive Operating Concept

The simple operating concept increases the operator's performance and thus the productivity of the small milling machine.

01




- 01** The ergonomically designed operator's platform with multifunctional armrest significantly increases the machine's productivity.
- 02** The operator has everything under control with just one hand.
- 03** The variable operator's platform that allows the position of the workstation to be changed increases the machine's range of applications.

Unobstructed View

An unobstructed view forward to the milled edge, of the right-hand side plate, and to the rear ensures that the machine can be used effectively on the job site in accordance with the on-site requirements.

Display

The display located in the operator's field of vision clearly shows important machine parameters.

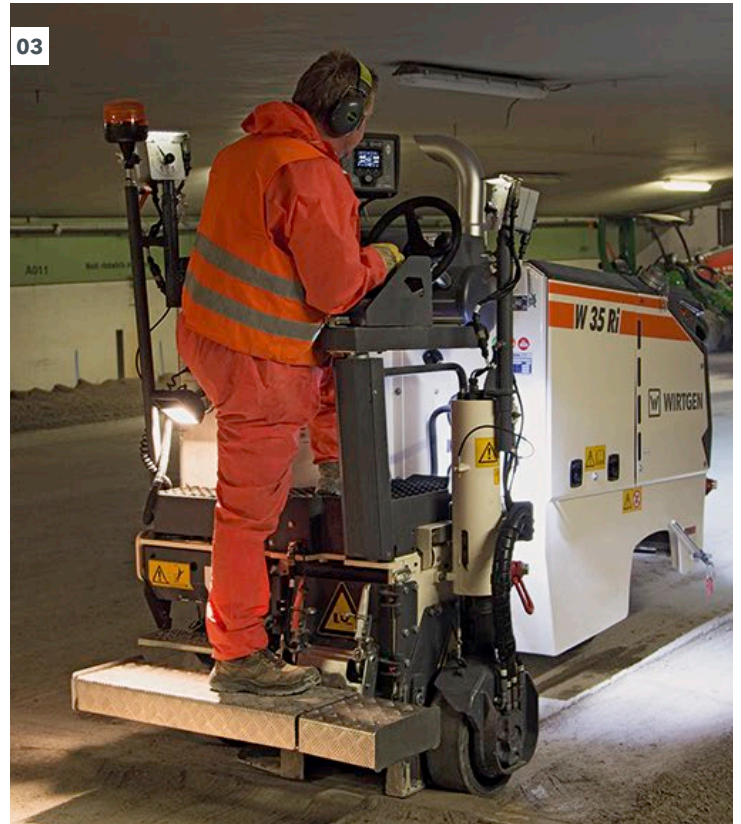

Adaptable for all Operational Requirements

Variable operator's cabin

Everything under Control

Ergonomic multifunctional armrest

A HIGHLY MANEUVERABLE AND COMPACT MACHINE



01

Tight Milling Radius
Large Steering Angles

Milling in Extremely Tight Spaces
Designed to be compact



- 01** The machine's impressive steering angles make operations on narrow job sites easier.
- 02** The small milling machine is ideally suited for fast maneuvering in narrow areas – also thanks to the ability to simply swing in the right rear wheel.

The outstanding maneuverability of the extremely compact W 35 XRi small milling machine means that it can be used to complete a variety of jobs in the narrow sections of a milling site much more quickly and easily.

Excellent Maneuverability

The large steering angles ensure that the machine can quickly maneuver and turn on the job site. It also features the smallest inside milling radius in its class.

Compact Machine Dimensions

Thanks to its extremely compact design, the small milling machine can mill in confined spaces, fit through narrow factory doors, and is easy to transport.

Precise Steering

The hydraulic steering system features fast yet precise steering. When operated from the operator's platform at the rear of the machine, the machine can be steered electronically via the steering system built into the multifunctional joystick.

PRECISE STEERING WITH HIGH TRACTION

The W 35 XRi is equipped with a sensitive steering system that enables it to mill with maximum precision whenever required – such as around hydrants or drains, for example. In addition, optimal traction ensures that milling operations can be carried out without interruption.

Hydraulic All-Wheel Drive

The machine's hydraulic all-wheel drive offers excellent traction in difficult job site situations and during loading.

Precise Height Adjustment

The electrohydraulic, two-stage height adjustment system allows the operator to set the milling depth precisely.

Memory Function for Height Adjustment

For fast, convenient height adjustment, it's possible to save up to three different height positions per machine side to memory buttons on the multifunctional armrest.

Electronically Controlled Travel Drive

The electronically controlled travel drive with one transport speed and two milling speeds makes fine maneuvering possible when extremely precise milling is required.





01 - 02 The electronically controlled travel drive makes high-precision milling possible - such as around road installations, for example.



Outstanding in All Situations
 Hydraulic all-wheel drive

Always the Right Milling Depth
 Three Savable Height Settings


FLEXIBILITY FOR DIFFERENT MILLING JOBS

Maximum Utilization Rates
HT08

Productivity Meets Efficiency
Demand-Oriented Water Sprinkling



02

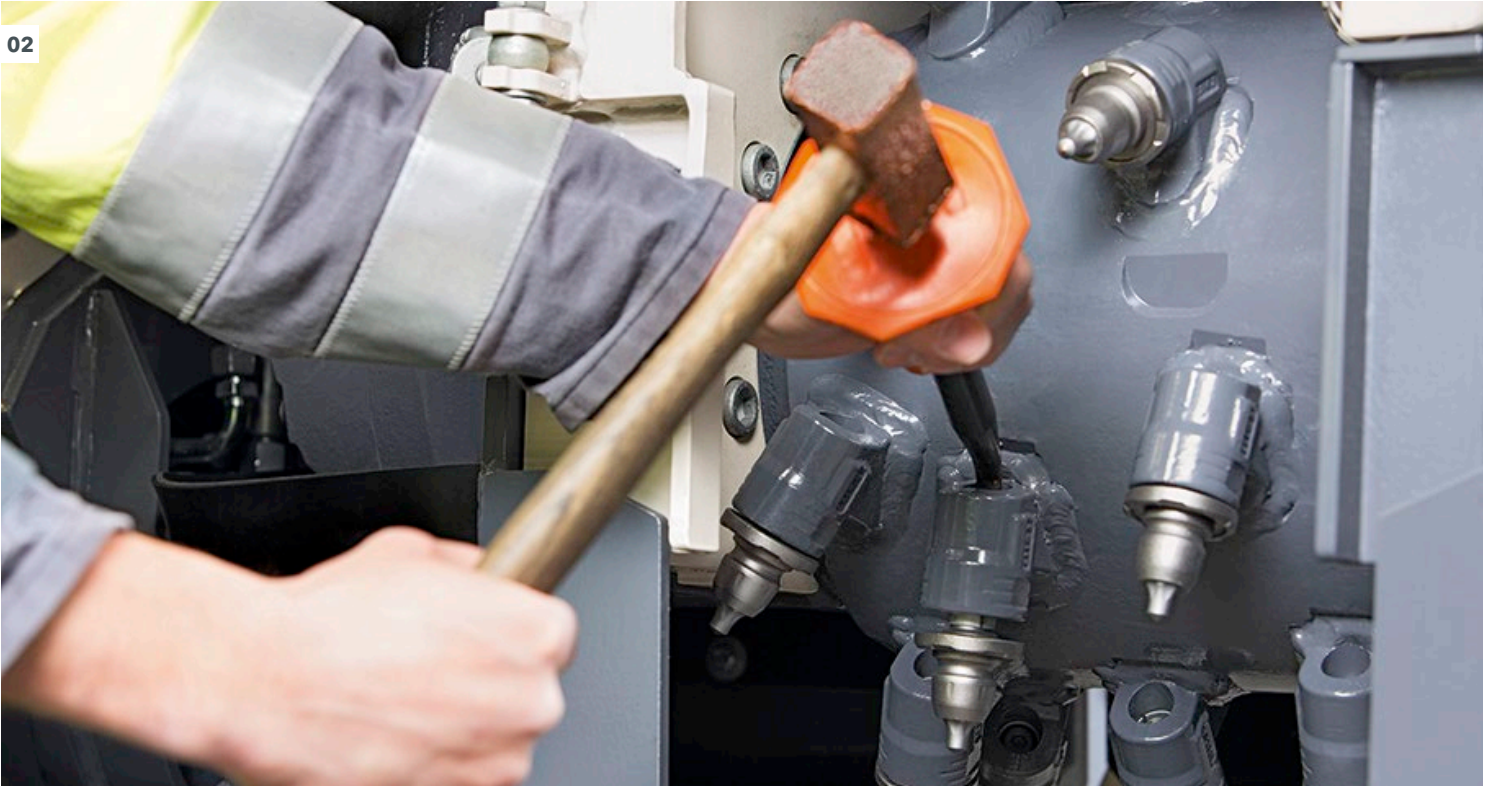

Intelligent milling drum, side plate, and scraper solutions make milling faster, easier, and increase overall quality.

Wear-Resistant HT08 Toolholder System

The HT08 toolholder system stands out thanks to its outstanding wear resistance and long tool life.

Raisable Side Plate on Right Side

Side plates on both sides reliably seal the drum housing and enable the milled material to be loaded cleanly. The side plate on the right side can be conveniently raised via a foot pedal in order to drive over obstacles (such as a curb).

High-Performance, Load-Dependent Water Sprinkling

Together with the water spray bar, the high-performance, load-dependent water pump reliably cools the picks, binds dust, and ensures that the machine remains productive for extended periods of time. It also maintains constant high water pressure for easy machine cleaning on the job site.



01 The right side plate can be raised via a foot pedal.

02 All of the picks can be easily and conveniently replaced after opening the MCS side panel.

03 The sprinkler unit is easily accessible and the individual spray nozzles can be easily removed for cleaning.

FLEXIBILITY FOR DIFFERENT MILLING JOBS



A Wide Range of Applications

A Whole Range of Milling Drums

Full Speed Ahead

Electronic Milling Performance Control

Numerous different milling drums make a wide range of applications possible.

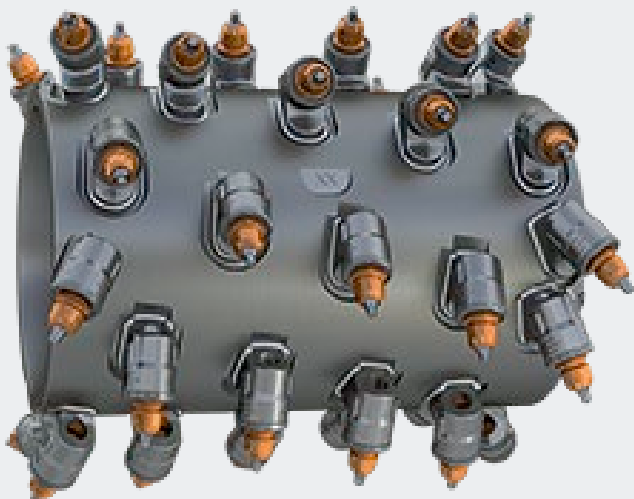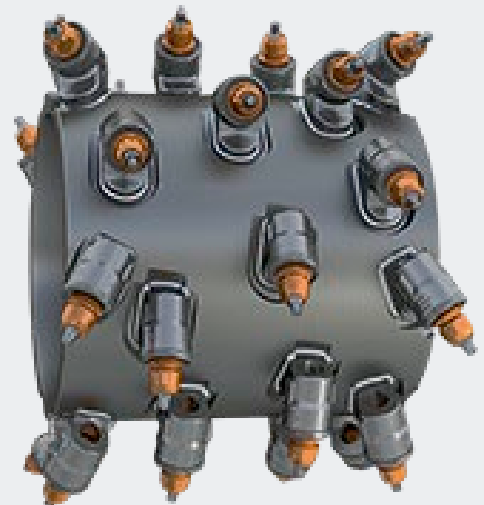

Milling Drum Housings for Working Widths up to 14 in (350 mm) and 20 in (500 mm)

The standard milling drum housing can be fitted with milling drums with a working width of up to 14 in (350 mm), and with milling drums with a working width of up to 20 in (500 mm) at the customer's request. A large number of different original WIRTGEN milling drums and special milling drums are available.

Rapid Milling Drum Changes



The hinged MCS side panel on the right and intelligent installation tools allow milling drums to be changed in a short period of time.

Three Different Milling Drum Speeds

Three different milling drum speeds make it possible to achieve unparalleled milling performance in a wide range of applications.

Milling Power Control for Maximum Advance Speed

The electronic load limitation regulator that can be activated as required adjusts the advance rate as a function of the engine load so that the small milling machine always operates at the ideal milling speed.

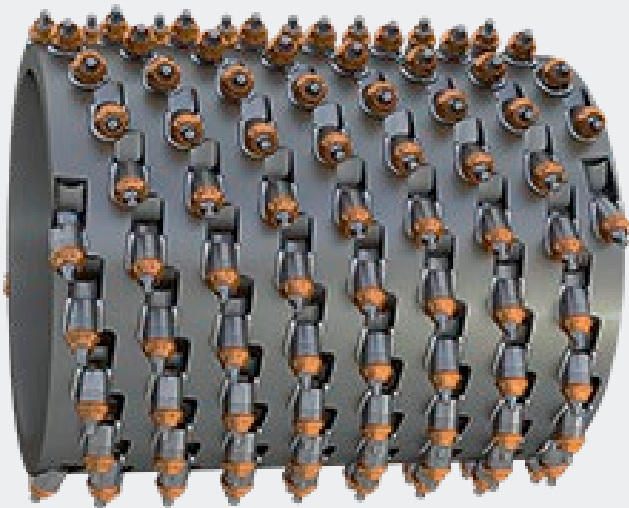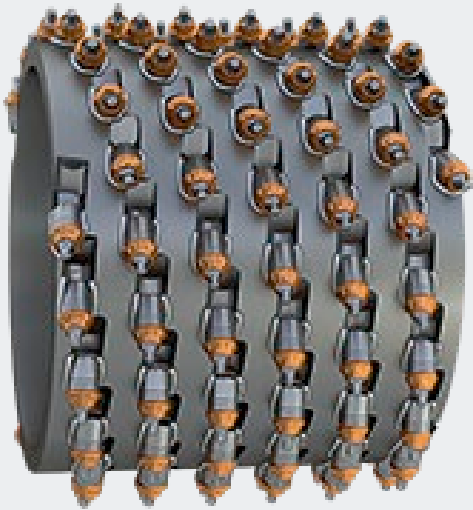

EFFICIENT LOADING OF MILLED MATERIAL

Anyone who has the arduous task of manually removing milled material from the milled surface will immediately appreciate the W 35 XRi rear loader's height-adjustable discharge conveyor that can swing in both directions. It transports the milled material effectively and safely into a wheel loader bucket, for instance.

Height-Adjustable Discharge Conveyor that can Swing in Both Directions

The height-adjustable discharge conveyor that can swing in both directions ensures that the milled material can be easily loaded, even in difficult job site conditions. In this process, the angle can be conveniently adjusted using a cable winch.

Hydraulically Raisable Conveyor Mounting

The hydraulically raisable conveyor mounting, combined with the hydraulic scraper, not only ensures that the milled material is loaded cleanly, but also makes it possible to load only part of the milled material, if required.

Rapid Mounting and Demounting of the Discharge Conveyor

The intelligent design ensures that the discharge conveyor can be mounted / demounted quickly by just one person. Thanks to the roller unit, the demounted discharge conveyor can be moved effortlessly around the job site.



01 The variably adjustable discharge conveyor makes it possible to reliably load a wheel loader bucket or mini-dumper.



Less Manual Labor
Variable discharge conveyor

Converted in no time at all
Fast discharge conveyor mounting

HIGH PRODUCTIVITY WITH LOW ENVIRONMENTAL EMISSIONS

The W 35 XRi equips contractors with sophisticated technology – a key factor in ensuring consistently high operational safety and daily output rates. The machine is even perfect for job sites that only allow minimal exhaust emissions.

High-Performance Diesel Engine that Meets US EPA Tier 4f Emission Standard

The powerful Diesel engine with temperature-dependent fan speed guarantees quiet, economical operation and high power

reserves for fast milling at any milling depth. The engine also meets the stringent requirements of the US EPA Tier 4f, currently the highest emission standard.

Variable Additional Weights

The wide ballasting range consists of individually removable weight plates up to a total of 3,087 lbs (1,400 kg), increasing the machine's range of applications.

Broad Spectrum of Applications

Individually Removable Additional Weights

Outstandingly Illuminated Machine Surroundings

High-power floodlights

01




WITOS FleetView Telematics System

WIRTGEN's efficient WITOS FleetView telematics system supports fleet management, position and status monitoring, as well as maintenance and diagnostic processes.

LED Work Lights

The ideal arrangement of the LED work lights ensures that the entire machine environment is brightly illuminated.

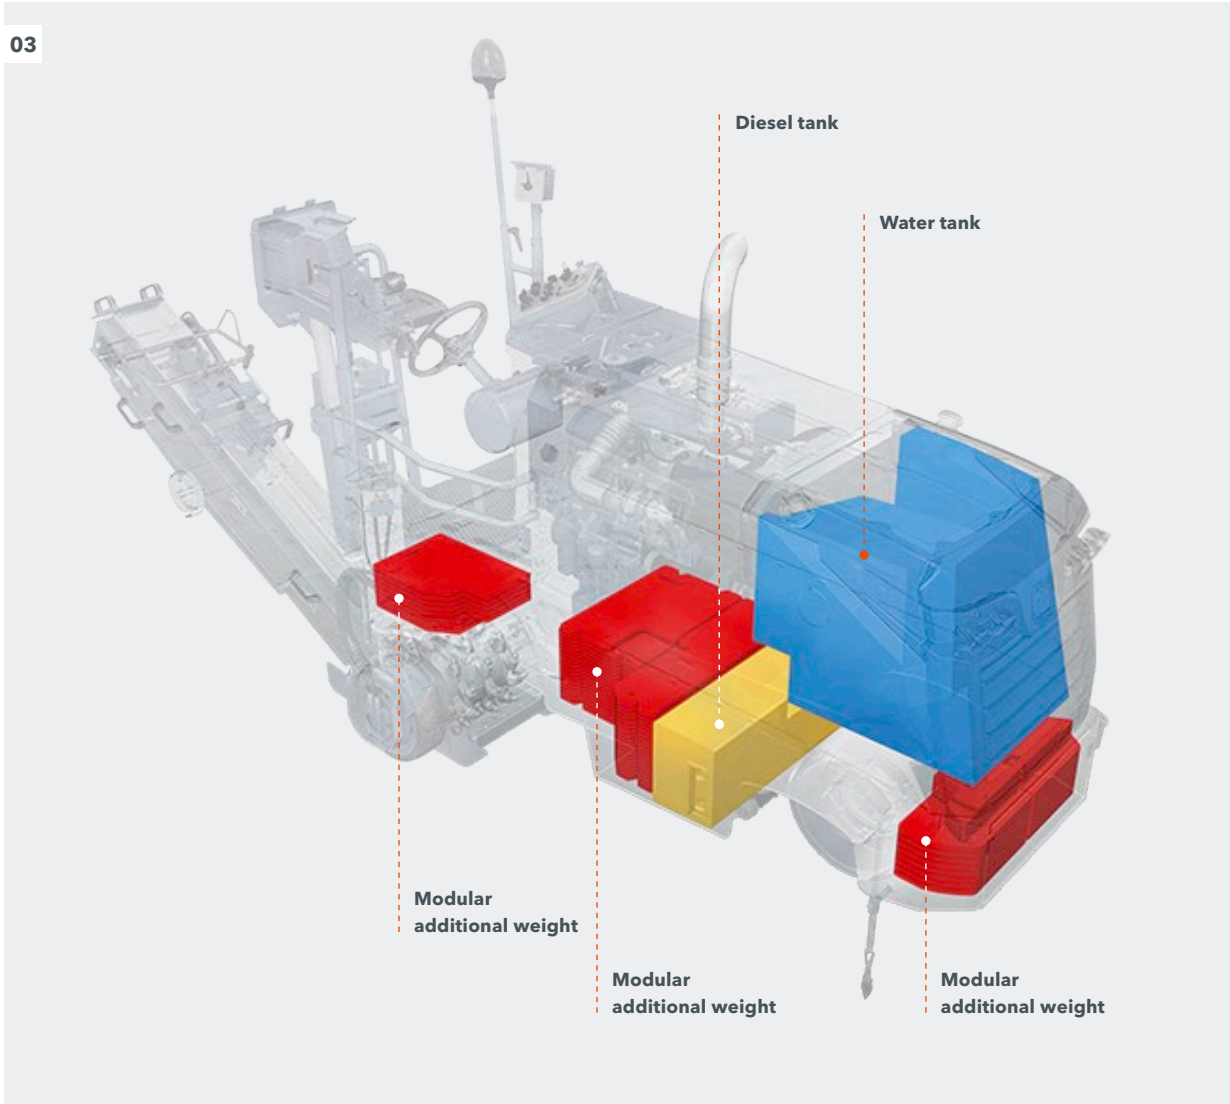

01 Excellent access to components makes servicing the machine easy.

02 LED headlights offer excellent visibility and safety in the dark.

03 Additional weights ensure that the machine has excellent traction in any application and without the additional weights, the machine can also be used for milling in buildings with limited load capacity, for example.





The highly maneuverable cold milling machine is perfect for milling jobs in confined spaces. The machine's range of applications can be extended through the use of a variety of different milling drums with milling drum housing widths 14 in (0.35 m) or 20 in (0.5 m). The machine is also suitable for renovation work in industrial warehouses or parking garages.




TECHNICAL SPECIFICATIONS W 35 XRi	STANDARD FB350	OPTIONAL FB500
Milling Drum		
Milling width	14 in (350 mm)	20 in (500 mm)
Milling depth ¹⁾	0 to 4 in (0 to 110 mm)	
Cutting diameter	18 in (460 mm)	
Engine		
Manufacturer	Deutz AG	
Type	TCD 2.9 L4	
Cooling	Wasser	
Number of cylinders	4	
Rated power at 2,300 rpm	45 kW / 60 HP / 61 PS	
Maximum power at 2,300 rpm	45 kW / 60 HP / 61 PS	
Displacement	176 in³ (2,925 cm³)	
Fuel consumption at rated power during a mixture of job site operations	3.5 gph (13.2 l/h) 2.3 gph (8.8 l/h)	
Sound power level in accordance with DIN EN 500-2 engine operator's platform	≤ 100 dB(A) ≥ 80 dB(A)	
Emissions standard	US EPA Tier 4f	
Electrical System		
Power supply	24 V	
Tank Capacities		
Fuel	18.5 gal (70 l)	
Hydraulic oil	8.5 gal (32 l)	
Water	72.6 gal (275 l)	
Driving Performance		
Max. milling speed	0 to 82 ft/min (0 to 25 m/min) (0 to 0.9 mph (0 to 1.5 km/h))	
Max. travel speed	0 to 328 ft/min (0 to 100 m/min) (0 to 3.7 mph (0 to 6 km/h))	
Tires		
Tire size, front (D x W)	20 in x 10 in (500 x 250 mm)	
Tire size, rear (D x W)	16 in x 5 in (405 x 130 mm)	
Loading of Milled Material		
Belt width of primary conveyor	10 in (250 mm)	
Theoretical capacity of discharge conveyor	43.2 yd³/h (33 m³/h)	

TECHNICAL SPECIFICATIONS W 35 XR i		STANDARD FB350		OPTIONAL FB500	
Basic Machine Weight					
Net weight of machine without fluids		6,548 lbs (2,970 kg)			
Operating weight, CE ²⁾ , including additional weights		10,252 lbs (4,650 kg)			
Maximum operating weight (full tanks, full range of equipment)		11,464 lbs (5,200 kg)			
Weight of Tank Contents					
Water		606 lbs (275 kg)			
Fuel (6.9 lbs/gal (0.83 kg/l))		128 lbs (58 kg)			
Additional Weight					
Operator and Tools					
> Machine operator		165 lbs (75 kg)			
> 2 pick containers		110 lbs (50 kg)			
> Vehicle tool kit		66 lbs (30 kg)			
Optional Milling Drum Units Instead of Standard		Absolute Weight		Additional / Reduced Weight	
> Attachments for milling drum housing FB350 - for operation with discharge conveyor		112 lbs (51 kg)		64 lbs (29 kg)	
> Attachments for milling drum housing FB500 - for operation without discharge conveyor		221 lbs (100 kg)		172 lbs (78 kg)	
> Attachments for milling drum housing FB500 - for operation with discharge conveyor		355 lbs (161 kg)		306 lbs (139 kg)	
Optional Milling Drums Instead of Standard					
> Fine milling drum FB350 (14 in) HT5 LA6 with 57 picks		238 lbs (108 kg)		40 lbs (18 kg)	
> Microfine milling drum FB350 (14 in) HT4 LA3 with 117 picks		227 lbs (103 kg)		29 lbs (13 kg)	
> Milling drum FB500 (20 in) HT08 LA15 with 39 picks		271 lbs (123 kg)		73 lbs (33 kg)	
> Fine milling drum FB500 (20 in) HT05 LA6 with 82 picks		353 lbs (160 kg)		154 lbs (70 kg)	
> Microfine milling drum gutter profile, FB150+2x25 (6 in + 2 x 1 in) (lateral taper) HT4 LA3 with 67 picks		154 lbs (97 kg)		15 lbs (7 kg)	
> Milling drum FB200+2x25 (8 in + 2 x 1 in) HT4 LA3 with 83 picks		216 lbs (98 kg)		18 lbs (8 kg)	
> Milling drum FB250+2x25 (10 in + 2 x 1 in)HT4 LA3 with 99 picks		221 lbs (100 kg)		22 lbs (10 kg)	
> Milling drum FB300 + 2x25 (12 in + 2 x 1 in) HT4 LA3 with 117 picks		221 lbs (100 kg)		22 lbs (10 kg)	
> Milling drum FB450 +2x25 (18 in + 2 x 1 in) HT4 LA3 with 166 picks		315 lbs (143 kg)		117 lbs (53 kg)	
> Saw blade FB14 (0.6 in) rail milling		22 lbs (10 kg)		-176 lbs (-80 kg)	
> Adapter with saw blade FB19 (0.7 in), FT100 (3.9 in)		29 lbs (13 kg)		-170 lbs (-77 kg)	
> Rail milling attachments Ri59N		126 lbs (57 kg)		126 lbs (57 kg)	
> Milling drum FB25 (1 in) with 6 picks rail milling		38 lbs (17 kg)		-161 lbs (-73 kg)	
> Milling drum FB45 (1.8 in) with 24 picks rail milling		62 lbs (28 kg)		-137 lbs (-62 kg)	
> Milling drum FB80 (3 in) HT02 FT110 with 12 picks		57 lbs (26 kg)		141 lbs (-64 kg)	
Optional Additional Weights					
> Modular additional weight		3,087 lbs (1,400 kg)			
Optional Additional Equipment					
> Discharge conveyor, 6 ft 2 in (1,870 mm) long, conveyor belt width 10 in (250 mm)		125 kg			
> Additional scraper plate FB350 (14 in) required for footboard unit (for machine with discharge conveyor)		18 kg		0 kg	
> Additional scraper plate FB500 (20 in) required for footboard unit (for machine with discharge conveyor)		22 kg		0 kg	
> Additional rear operator's platform position		51 kg			
> Side milling ring FB80 (3 in), milling depth 7 in (180 mm) complete		196 kg		84 kg	
> Hydraulic hammer including 32 ft 10 in (10-m) connecting hose		37 kg			

¹⁾ The maximum milling depth may deviate from the value indicated due to tolerances and wear.

²⁾ Machine weight, half-full tanks, vehicle tool kits, machine operator, excluding optional equipment



SIDE VIEW / TOP VIEW W 35 XRi

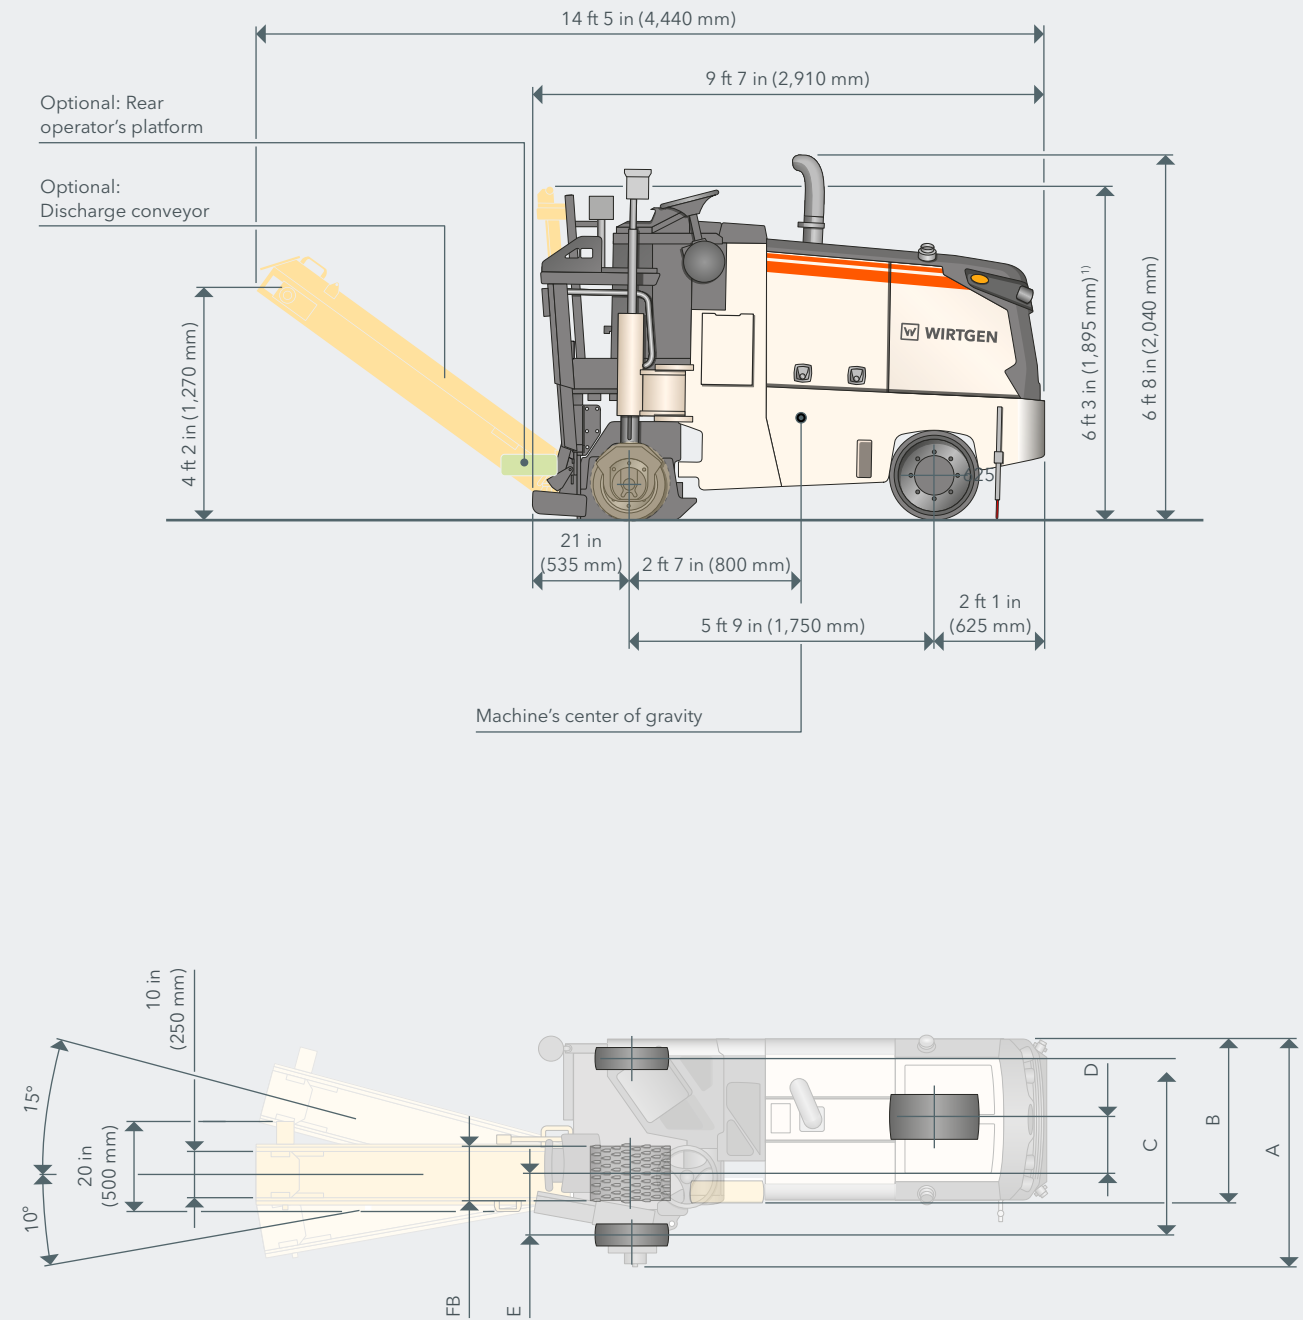

	A	B	C	D	E	FB
Standard FB350	3 ft 11 in (1,200 mm)	2 ft 11 in (900 mm)	3 ft 1 in (945 mm)	12 in (310 mm)	12 in (295 mm)	14 in (350 mm)
Optional FB500	4 ft 5 in (1,350 mm)	2 ft 11 in (900 mm)	3 ft 7 in (1,095 mm)	15 in (385 mm)	15 in (370 mm)	20 in (500 mm)

¹⁾ Maximum machine height with exhaust pipe removed

MILLING RADIUS W 35 XRi AT MILLING DEPTH OF 2 IN (50 MM)

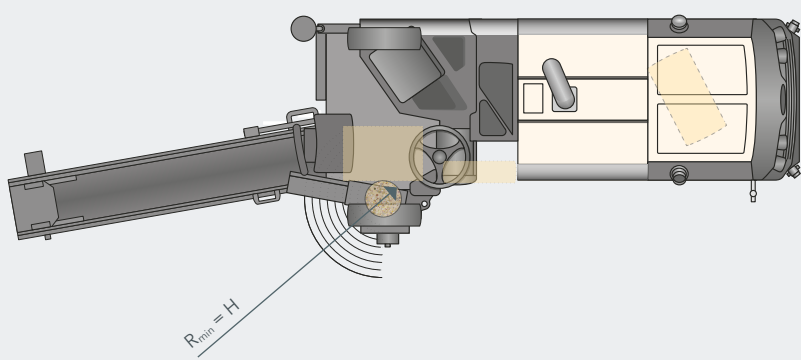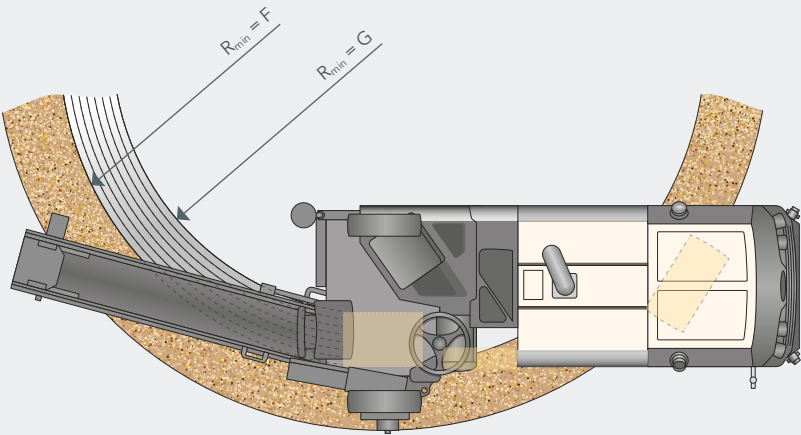

	F	G	H
Standard FB350	9 ft 10 in (2,990 mm)	8 ft 8 in (2,640 mm)	3 in (80 mm)
Optional FB500	10 ft 4 in (3,140 mm)	8 ft 8 in (2,640 mm)	0 in (0 mm)

STANDARD EQUIPMENT W 35 XRi**Basic Machine**

- > Base machine with engine
- > Robust machine chassis
- > Wide opening engine cowlings, with gas spring support and highly effective noise insulation
- > Radiator with temperature-dependent fan speed
- > Integrated 72 gal (275 liter) water tank
- > Integrated 18 gal (70 liter) diesel tank
- > Loading and tie-down points integrated in the chassis

Milling Drum Unit

- > Water sprayingstrip with on/off function for pick cooling with water pump with load-dependent control
 - > Wide opening milling drum door with automatic electrical safety shut-down
 - > Right side plate in hinged configuration in conjunction with centering pin system on the milling drum holder for quick and easy change of milling drums
 - > The right-hand side plate can be easily lifted using the foot pedal on the operator's stand
- Ancillary parts for milling drum housing FB350 (14 in) - for operation without discharge conveyor

Milling Drums

- > Milling drum FB350 (14 in) HT08 LA15 with 31 picks

Machine Control and Leveling System

- > WIDRIVE machine controller to reduce operator workload and increase performance
- > Mechanical milling depth display right and left

Operator's Platform

- > Flexibly mounted operator's platform on the top of the machine
- > Multi-function armrest on right with up/down and front/back adjustment with joystick and various controls ergonomically arranged
- > Display for important machine parameters on the left control panel
- > Convenient operating console with practical switches
- > Convenient footstep to the operator's platform
- > Operator's platform with vibration damping
- > Steering console with adjustable inclination
- > Lockable control panel covers
- > Flexibly mounted operator's platform on the machine

STANDARD EQUIPMENT W 35 XR i

Track Unit and Height Adjustment

> Hydraulic 3-wheel all-wheel drive with hydraulic flow distributor	■
> Two manually engageable milling speeds as well as one traveling gear	■
> Hydraulic, easy front wheel steering	■
> Hydraulic spring-loaded multi-disc brake	■
> Hydraulic height adjustment with two speeds at the rear track units	■
> Manually folding-in rear right wheel	■

Miscellaneous

> Lockable toolbox with toolkit for maintenance and servicing	■
> Additional mount for a pick container	■
> Device for towing away for releasing the spring-loaded multi-disc brake	■
> Reversing horn	■
> Extensive safety package with EMERGENCY STOP switch	■
> Pre-fitting for installing the WITOS FleetView control unit	■
> European type certification, EuroTest mark and CE conformity	■
> Standard film coating in RAL 9001 (cream)	□
> WITOS - professional telematics solution for machine operation and service optimization	□
> Halogen lighting system including rotary beacon	□

- = Standard equipment
 □ = Standard equipment, can be replaced with optional equipment if desired
 □ = Optional equipment

OPTIONAL EQUIPMENT W 35 XRi

Milling Drum Unit

> Ancillary parts for milling drum housing FB350 (14 in) - for operation with discharge conveyor	<input type="checkbox"/>
> Ancillary parts for milling drum housing FB500 (20 in) - for operation without discharge conveyor	<input type="checkbox"/>
> Ancillary parts for milling drum housing FB500 (20 in) - for operation with discharge conveyor	<input type="checkbox"/>

Milling Drums

> Milling drum FB500 (20 in) HT08 LA15 with 39 picks	<input type="checkbox"/>
> Side milling ring FB80 (3 in), milling depth 7 in (180 mm) complete	<input type="checkbox"/>
> Ancillary parts rail milling Ri59N	<input type="checkbox"/>
> Milling drum FB25 (1 in) with 6 picks rail milling	<input type="checkbox"/>
> Milling drum FB45 (1.8 in) with 24 picks rail milling	<input type="checkbox"/>
> Saw blade FB14 (0.6 in) rail milling	<input type="checkbox"/>
> Saw blade FB19 (0.7 in) rail milling	<input type="checkbox"/>
> Adapter with saw blade FB14 (0.6 in), FT100 (3.9 in)	<input type="checkbox"/>
> Adapter with saw blade FB19 (0.7 in), FT100 (3.9 in)	<input type="checkbox"/>
> Milling drum FB350 (14 in) HT08 LA15 with 31 picks	<input type="checkbox"/>
> Fine milling drum FB350 (14 in) HT5 LA6 with 57 picks	<input type="checkbox"/>
> Microfine milling drum FB350 (14 in) HT4 LA3 with 117 picks	<input type="checkbox"/>
> Microfine milling drum gutter profile, FB150+2x25 (6 in + 2 x 1 in) (lateral taper) HT4 LA3 with 67 picks	<input type="checkbox"/>
> Milling drum FB200+2x25 (8 in + 2 x 1 in) HT4 LA3 with 83 picks	<input type="checkbox"/>
> Milling drum FB250+2x25 (10 in + 2 x 1 in) HT4 LA3 with 99 picks	<input type="checkbox"/>
> Milling drum FB300 + 2x25 (12 in + 2 x 1 in) HT4 LA3 with 117 picks	<input type="checkbox"/>
> Milling drum FB80 (3 in) HT02 FT110 with 12 picks	<input type="checkbox"/>
> Fine milling drum FB500 (20 in) HT05 LA6 with 82 picks	<input type="checkbox"/>
> Milling drum FB450 +2x25 (18 in + 2 x 1 in) HT4 LA3 with 166 picks	<input type="checkbox"/>

Loading of the Milled Material

> Discharge conveyor, 6 ft 2 in (1,870 mm) long, conveyor belt width 10 in (250 mm), includes rope winch height adjustment	<input type="checkbox"/>
> Connection pipe Ø 5 in (120 mm) for dust extraction	<input type="checkbox"/>

OPTIONAL EQUIPMENT W 35 XR i

Machine Control and Leveling System

> LEVEL PRO <i>PLUS</i> leveling system right and left	<input type="checkbox"/>
> Pre-fitting for laser leveling with two laser receiver- without laser transmitter	<input type="checkbox"/>
> RAPID SLOPE cross-slope sensor for LEVEL PRO <i>ACTIVE</i> leveling system	<input type="checkbox"/>
> Pre-programmable height positions with automatic positioning	<input type="checkbox"/>

Operator's Platform

> Additional rear operator's platform position	<input type="checkbox"/>
> Equipment of the operator's platform with a stand-up seat	<input type="checkbox"/>
> Additional scraper plate FB350 (14 in) required for footboard unit (for machine with discharge conveyor)	<input type="checkbox"/>
> Additional scraper plate FB500 (20 in) required for footboard unit (for machine with discharge conveyor)	<input type="checkbox"/>

Miscellaneous

> Hydraulic drive for discharge conveyor or hydraulic jack hammer	<input type="checkbox"/>
> Film coating according to the customer's wishes	<input type="checkbox"/>
> Model without WITOS	<input type="checkbox"/>
> High-power lighting system LED including rotating beacon	<input type="checkbox"/>
> Modular additional weight 3,086 lbs (1,400 kg)	<input type="checkbox"/>
> Hydraulic hammer including 32 ft 10 in (10-m) connecting hose	<input type="checkbox"/>
> License plate holder with LED lighting	<input type="checkbox"/>

- ☒ = Standard equipment
☐ = Standard equipment, can be replaced with optional equipment if desired
☐ = Optional equipment





**WIRTGEN AMERICA Inc.**

6030 Dana Way
Antioch, TN 37013
USA

P: (615) 501-0600

F: (615) 501-0691

 www.wirtgen-group.com/america



For further information, please scan the code.