

Technical information

MINI 500



Tracked paver MINI 500

Mini Class

TECHNICAL HIGHLIGHTS

- > Maximum pave width 10 in. – 5 ft. 11 in. (0.25 m – 1.8 m)
- > Pave speed up to 1.5 mph (2.4 km/h)
- > Maximum laydown rate 22 tons/h (20 tonnes/h)
- > Transport width 2 ft. 11 in. (0.9 m)

MINI 500 - Compact Design, Truly Revolutionary

Conventional asphalt pavers are not especially suitable for projects with a pave width of less than 4 ft. 11 in. (1.5 m) - asphaltting cycle paths or ditches for pipelines/fiber optic cables, for example. As a consequence, these projects are often completed manually, requiring at least four laborers. The result is frequently an uneven and relatively poor-quality surface course.

Our MINI 500 compact paver was designed to supply the market with a machine to make it easier for contractors to complete this type of project. Its maneuverability, compact size and low weight are outstanding.



TECHNICAL DATA	MINI 500
Power unit	
Engine	
> Version	Liquid-cooled 2-cylinder diesel engine
> Manufacturer	Kubota
> Type	Z602-E4B-EU-X7
Output	
> Nominal	14 hp (10.2 kW) at 3,200 rpm
> ECO mode	11 hp (8 kW) at 2,500 rpm
Emissions information	
> Exhaust emission standards	EU Stage V, US EPA Tier 4f
Fuel tank	4 gallons (US) (16 liters)
Undercarriage	
Crawler tracks	
> Version	Rubber-bonded steel tracks
> Ground contact	3 ft. 7 in. x 7 in. (1,100 x 180 mm)
> Track tension adjuster	Spring assembly
> Lubrication of track rollers	Lifetime
Traction drive	Closed loop hydraulic system
Speeds	
> Paving	Up to 131 fpm (40 m/min.), infinitely variable
> Travel	Up to 131 fpm (40 m/min.), infinitely variable
Material hopper	
Hopper capacity	1.32 tons (1.2 tonnes)
Width	4 ft. 10 in. (1,245 mm) (with hopper sides open)
Dump height	4 ft. 7 in. (1,400 mm)

Conveyors and augers

Conveyor

> Version	1, with wear-resistant steel conveyors with reversible running direction
> Drive	Separate hydraulic drives
> Speed	Up to 56 fpm (17 m/min.), infinitely variable

Augers

> Version	2, reversible auger rotation
> Diameter	6 in. (140 mm)
> Drive	Independent hydraulic drives for each conveyor and each auger
> Option	Independent controls for each conveyor and each auger
> Speed	94 rpm

Auger height 4 in. (10 cm) from the ground to the bottom edge of the augers

Screed options

AB 135


Basic width	2 ft. 7 in. to 4 ft. 5 in. (0.8 m to 1.35 m)
Maximum width	5 ft. 11 in. (1.8 m)
Minimum width	10 in. (0.25 m)
Compacting system	V
Layer thickness	Up to 4 in. (10 cm)
Screed heating	
> Version	Gas heating with 3 burners and electronic ignition
> Power supply	Gas bottle

Dimensions (transport) and weights

Transport width	2 ft. 11 in. (0.9 m)
Length	Tractor unit and screed
> AB 135	8 ft. 6 in. (2.6 m) (with footstep folded away)
Weights	Tractor unit and screed
> AB 135	3,175 lbs (1,440 kg)
> AB 135 with bolt-on extensions	3,228 lbs (1,464 kg)

Key: AB = Extending Screed, V = with vibrators

SIDE AND FRONT VIEW

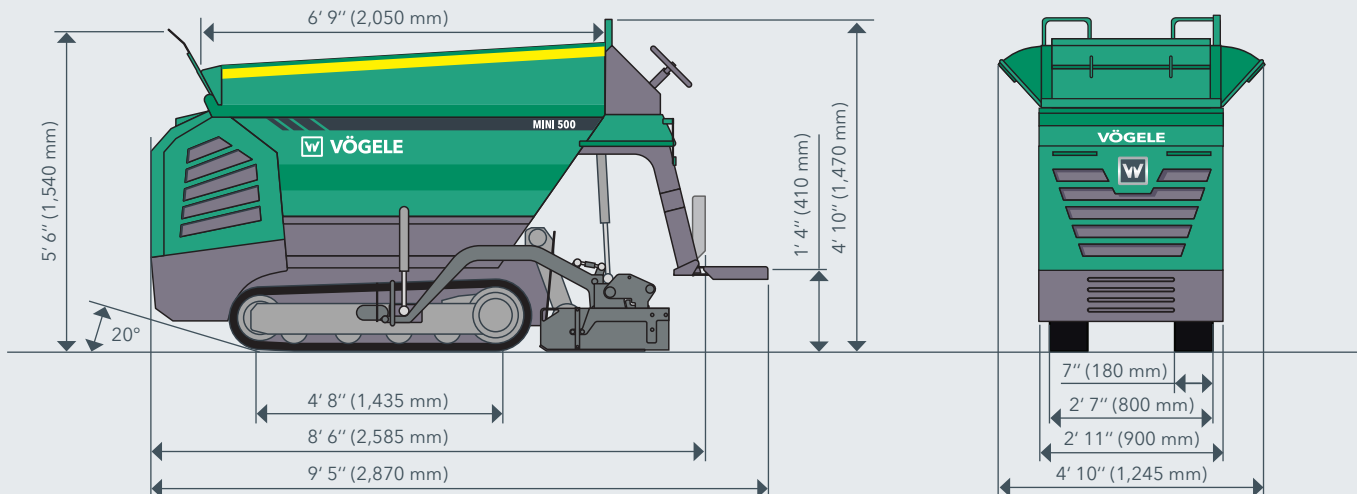

THE HIGHLIGHTS OF THE MINI 500

- > Water-cooled 2-cylinder diesel engine with an output of 14 hp (10.2 kW) ensures adequate drive power. Meets current EU Stage V exhaust emissions standards as well as EPA Tier 4.
- > Powerful hydrostatic drives efficiently apply the output of the diesel engine.
- > The rubber tracks ensure optimum traction on loose sub-bases. Their extraordinary maneuverability means the tracked pavers can operate in an incredibly tight space.
- > Its material hopper with a capacity of 1,32 tons (1.2 tonnes) and the hopper sides allow the machine to be fed simply and conveniently by wheel loaders or excavators.
- > A conveyor made of wear-resistant steel transports the material to the sensor-controlled augers, which ensure a consistent head of material in front of the screed.
- > From the operator's standing position, a perfect overview is provided and the operator is able to conveniently handle the paver alone. The self-explanatory symbols and clear arrangement of the controls make MINI pavers very easy to operate.
- > Thanks to their compact dimensions, MINI pavers are ideal for construction projects involving the tightest of spaces, where a mechanical paving process would once have been inconceivable.
- > The AB 135 covers a broad range of paving applications. The minimum pave width with cut-off shoes is 10 in. (25 cm), whilst maximum width with bolt-on extensions is 5 ft. 11 in. (1.8 m). Compaction is effected by hydraulically controlled eccentric vibrators.
- > The screed is heated by liquid gas, with electronic ignition for maximum safety.

FEATURES	MINI 500
> Rubber-bonded steel tracks	■
> Hydraulic transmission system	■
> Electronic potentiometer for high-precision speed adjustment	■
> 40-amp alternator	■
> Gas-heated screed with hydraulically adjustable pave width: 2 ft. 7 in. to 4 ft. 5 in. (800 - 1,350 mm)	■
> Hydraulic vibrators with standby control	■
> Hydraulic system for checking layer thickness	■
> Automatic system for temperature control, electronic ignition	■
> Reducing system (minimum pave width: 10 in. (25 cm))	□
> Separate augers and conveyors, driven by a single motor and two feed sensors	□
> Remote control for the operator to adjust the screed	□

This list is just an extract of the scope of supply.
Standard features and options may differ by sales region.

■ Standard feature □ Option

Wirtgen America, Inc.

6030 Dana Way
Antioch, TN 37013
USA

T: +1 615 501-0600
F: +1 615 501-0691
M: info.america@wirtgen-group.com

> www.wirtgen-group.com/america

