

3412 P


Soil compactor with padfoot drum
Compactors Series 3000 / Series H180









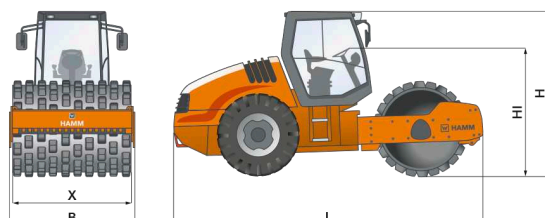


HIGHLIGHTS 3000

- > 3-point articulation for outstanding traction and off-road mobility
- > Simple, intuitive and language-neutral operation
- > Ergonomic driver platform with rotatable seat operating unit, adjustable driver's seat and tilting steering column
- > Excellent view of the machine and the construction site
- > High compaction performance thanks to high line load and big amplitudes

Machine dimensions		
Total length (L)	mm	5705
Width (B)	mm	2250
Total height (H)	mm	3010
Drum width (X)	mm	2140
Height loading, min. (Hl)	mm	2325



TECHNICAL DATA		Unit	3412 P
	Weights		
	Operating weight with cab	kg	12300
	Operating weight with ROPS	kg	12080
	Basic weight no cab, without ROPS	kg	11630
	Operating weight, max.	kg	13830
	Axle load, front/rear	kg	6805/5495
	French classific., data/class		43,4/VPM3
	Load per tyre, rear	kg	2747,5
	Machine dimensions		
	Total length	mm	5705
	Total height with cab	mm	3010
	Total height with ROPS	mm	2945
	Height loading, min.	mm	2325
	Wheel base	mm	3015
	Total width with cab	mm	2250
	Max. working width	mm	2140
	Ground clearance, centre	mm	375
	Kerb clearance, left/right	mm	465/465
	Turning radius, inside	mm	3690
	Angle of driving slope, front/rear	°	35/34
	Drum dimensions		
	Drum width, front	mm	2140
	Drum diameter, front	mm	1684
	Drum thickness, front	mm	20
	Drum type, front		Padfoot
	Height of the padfeet	mm	100
	Padfeet, number		140
	Wheel dimensions		
	Size of tyres, rear		TR 23.1-26 12 PR
	Width over tyres, rear	mm	2130
	Number of tyres, rear		2
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 2012 L04 2V
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		100,0/136,0/2300
	Power rating SAE J1349, kW/HP/rpm		100,0/134,0/2300
	Emission standard		EU Stage IIIA / EPA Tier 3
	Drive		
	Speed, working gear	km/h	0-3,8/0-5,2/0-6,4
	Speed, transportation gear	km/h	0-11,3
	Climbing ability, vibration on/off	%	57/62
	Vibration		
	Vibration frequency, front, I/II	Hz	30/40
	Amplitude, front, I/II	mm	1,87/0,88
	Centrifugal force, front, I/II	kN	256/215
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	290
	Sound level		
	Acoustic power LW(A), sticker	db(A)	106
	Acoustic power LW(A), measured	db(A)	103

EQUIPMENT

2 armrests, 3-point articulation, Adjustable scraper, Dashboard with displays, indicator lights and switches, Automatic traction control and anti-slip control, Battery isolation switch, Control console with steering column adjustment, Operator's platform with entry from both sides, Speed preselect, Hydrostatic steering, Vibration-isolated operator's platform, Stepless hydrostatic all-wheel drive

OPTIONAL EQUIPMENT

Auxiliary heater, Radio, Tachograph, HCQ Navigator, Protective roof, Version with additional fuel prefilter, HAMM Compaction Meter (HCM), Speedometer, Frequency display, vibration, Back-up alarm (reversing), Telematics interface, Working lights, Rotating beacon, Protective grille for lighting package, Hydraulic hose protection on front frame, Tool kit

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

