

# H 5i P

Compactor with padfoot drum


Compactors Series H CompactLine / Series H270









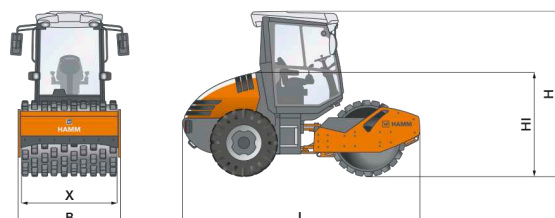



## HIGHLIGHTS H CompactLine

- > 3-point articulation for outstanding traction and off-road mobility
- > Simple, intuitive and language-neutral operation
- > Excellent view of the machine and the construction site
- > High climbing ability
- > Compact dimensions

Machine dimensions		
Total length (L)	mm	4040
Width (B)	mm	1500
Total height (H)	mm	2867
Drum width (X)	mm	1370
Height loading, min. (Hl)	mm	2867



EU Stage V /  
EPA Tier 4

TECHNICAL DATA		Unit	H 5i P
	<b>Weights</b>		
	Operating weight with cab	kg	5155
	Operating weight with ROPS	kg	4935
	Operating weight, max.	kg	5530
	Axle load, front/rear	kg	2745/2410
	French classific., data/class		24,1/VP1
	<b>Machine dimensions</b>		
	Total length	mm	4040
	Total height with cab	mm	2867
	Height loading, min.	mm	2867
	Wheel base	mm	2168
	Total width with cab	mm	1500
	Ground clearance, centre	mm	270
	Turning radius, inside	mm	3375
	Angle of driving slope, front/rear	°	43/36
	<b>Drum dimensions</b>		
	Drum width, front	mm	1370
	Drum diameter, front	mm	1155
	Drum thickness, front	mm	15
	Drum type, front		Padfoot
	Height of the padfeet	mm	80
	Padfeet, number		60
	<b>Wheel dimensions</b>		
	Size of tyres, rear		TR 12.4-24 8 PR
	<b>Diesel engine</b>		
	Manufacturer		KUBOTA
	Version		V3307-CR-T
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2200
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2200
	Emission standard		EU Stage V / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF
	<b>Drive</b>		
	Speed, working gear	km/h	0-6,0
	Speed, transportation gear	km/h	0-12,5
	Climbing ability, vibration on/off	%	55/60
	<b>Vibration</b>		
	Vibration frequency, front	Hz	30
	Amplitude, front	mm	1,45
	Centrifugal force, front	kN	69
	<b>Steering</b>		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	<b>Tank capacity/Fill capacity</b>		
	Fuel tank, capacity	L	123
	<b>Sound level</b>		
	Acoustic power LW(A), sticker	db(A)	104
	Acoustic power LW(A), measured	db(A)	102

#### EQUIPMENT

12 V sockets (double), 2 large working and rear view mirrors, 3-point articulation, Trays, Anti-slip control, Fixture for cold box, ECO mode, Spring-mounted driver's seat with armrest and safety belt, Large angle of driving slope at front and rear, Hose protection on front vehicle, Maintenance points, central on one machine side, CE conformity, ROPS, rigid, Steering column adjustment, Lighting package as per road traffic regulations

#### OPTIONAL EQUIPMENT

ROPS cabin with heating and door to the left, FOPS-approved (level I), Safety belt monitoring device, Air conditioning, Radio, HCQ Navigator, Protective roof, Dozer blade, HAMM Compaction Meter (HCM), Speedometer, Automatic engine-off function, Telematics system, interface, Automatic vibration system, Working lights, Rotating beacon, Battery isolation switch

**HAMM AG**  
Hammstraße 1  
D-95643 Tirschenreuth  
Tel +49 9631 80-0  
Fax +49 9631 80-111  
www.hamm.eu

