




# DELIVERY RANGE **INDIA**



**CLOSE TO OUR CUSTOMERS**

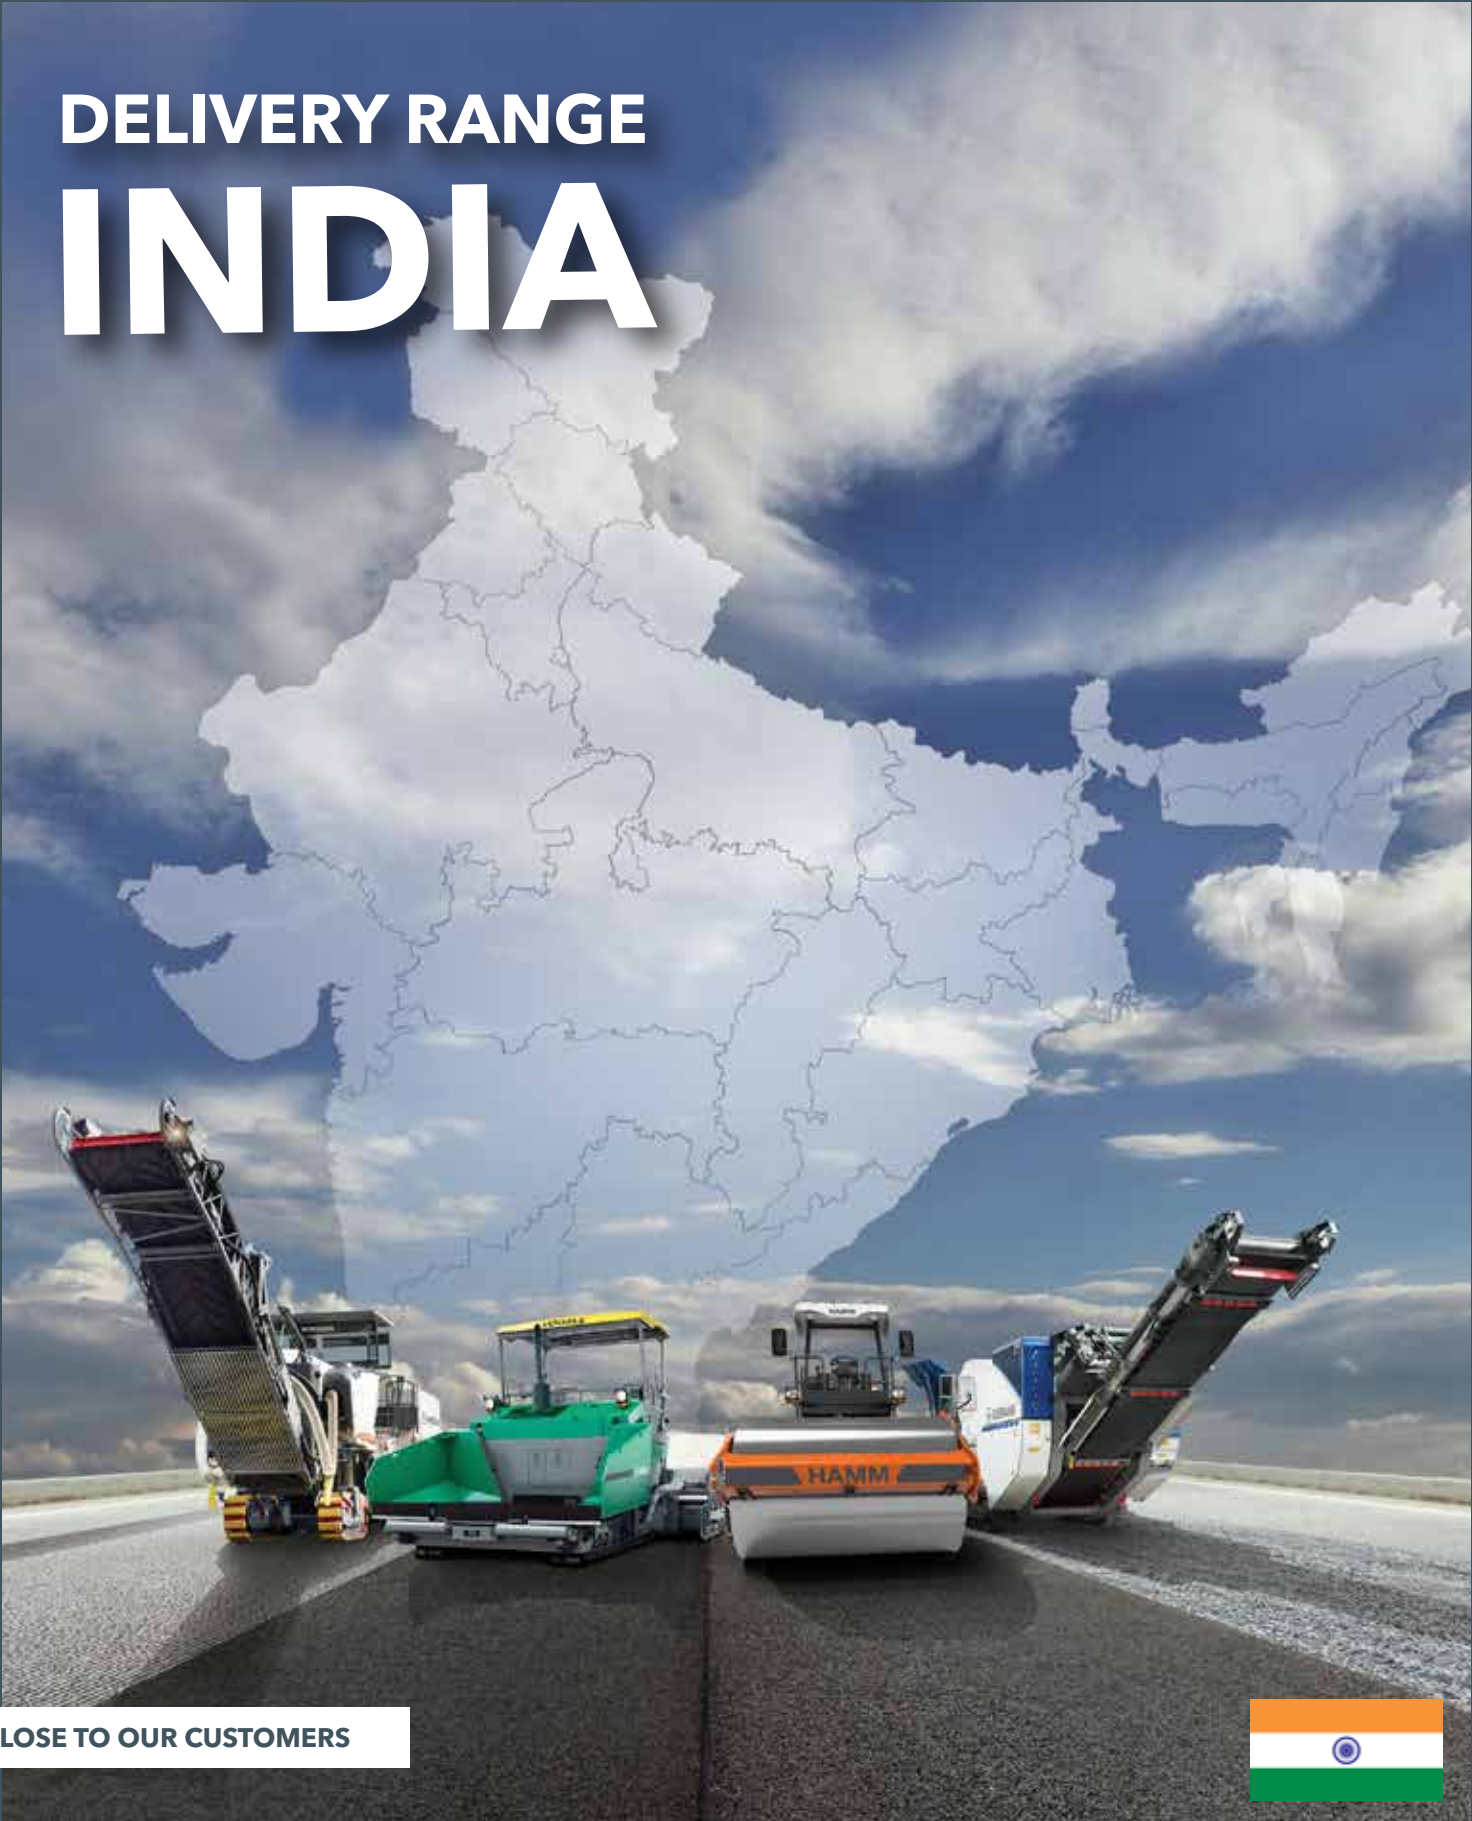

# CONTENTS

|       |   |           |
|-------|---|-----------|
| ----- | <b>WIRTGEN GROUP OVERVIEW</b>                 | <b>04</b> |
| ----- | <b>STRONG IN INDIA</b>                        | <b>10</b> |
| ----- | <b>WIRTGEN SARATHI / PREOWNED MACHINES</b>    | <b>12</b> |
| ----- | <b>DIGITAL SOLUTIONS IN ROAD CONSTRUCTION</b> | <b>13</b> |
| ----- | <b>WIRTGEN DELIVERY RANGE</b>                 |           |
|       | Cold Milling Machines                         | 17        |
|       | Cold Recyclers and Soil Stabilizers           | 18        |
|       | Rock Crusher                                  | 18        |
|       | Binding Agent Spreaders                       | 19        |
|       | Slipform Pavers                               | 20        |
|       | Surface Miners                                | 21        |
| ----- | <b>VÖGELE DELIVERY RANGE</b>                  | <b>22</b> |
|       | Universal Class                               | 23        |
|       | Highway Class                                 | 23        |
|       | Special Class                                 | 24        |
|       | PowerFeeder                                   | 24        |
| ----- | <b>HAMM DELIVERY RANGE</b>                    | <b>26</b> |
|       | HD Series of Articulated Tandem Rollers       | 27        |
|       | HC Series of Soil Compactors                  | 27        |
| ----- | <b>KLEEMANN DELIVERY RANGE</b>                | <b>28</b> |
|       | MOBICAT Mobile Jaw Crushers                   | 29        |
|       | MOBIREX Mobile Impact Crushers                | 29        |
|       | MOBICONE Mobile Cone Crushers                 | 30        |
|       | MOBISCREEN Mobile Screening Plants            | 30        |
|       | MOBIBELT Mobile Stackers                      | 31        |

**WIRTGEN  
DELIVERY RANGE**

**16**

**VÖGELE  
DELIVERY RANGE**

**22**

**HAMM  
DELIVERY RANGE**

**26**

**KLEEMANN  
DELIVERY RANGE**

**28**



# WELL ROUNDED.

THE WIRTGEN GROUP IS A GROUP OF COMPANIES ACTIVE IN THE GLOBAL CONSTRUCTION MACHINERY INDUSTRY. OUR STRENGTH RESULTS FROM THE STRENGTH OF OUR FIVE LONG-ESTABLISHED PRODUCT BRANDS WIRTGEN, VÖGELE, HAMM, KLEEMANN, AND BENNINGHOVEN. WE OFFER INNOVATIVE AND RELIABLE SOLUTIONS IN OUR ROAD AND MINERAL TECHNOLOGIES BUSINESS SEGMENTS.

---

Our corporate group is at home all over the world. Five specialized production facilities in Germany; three local production facilities in Brazil, China, and India; a large number of our own sales and service companies; and a global dealer network make us successful around the globe. Despite our international alignment, we never lose sight of our roots. Our corporate culture is based on our history of delivering value - for the success of our customers on job sites around the world. This is what motivates our employees to work together to develop innovative processes and manufacture high-quality products.

## ROAD AND MINERAL TECHNOLOGIES

We have established a successful position in our two business segments: with our innovative solutions for new road construction and road rehabilitation, we have become the market leader in the Road Technologies business segment. Our cost-effective and reliable products for the Mineral Technologies business segment offer cutting-edge technology for extracting and processing minerals, recycling building materials, and producing asphalt.

Our premium product brands focus entirely on their respective areas of expertise, united in a common focus on the needs of our customers.

WIRTGEN is the market leader for milling machines and recyclers in road construction and offers slipform pavers and surface miners with best-in-class quality and technology.

VÖGELE is the global market leader and sets the trends in the industry with a complete range of road pavers, screeds, and feeders.

HAMM is the specialist for rollers and unrivaled in asphalt compaction.

KLEEMANN is the global technology leader in the market for mobile crushing and screening plants.


\* BENNINGHOVEN builds the world's leading asphalt mixing plants.

\* CIBER is the Brazilian mobile asphalt mixing plant specialist and local production facility.

The WIRTGEN GROUP is proud to be a strong part of John Deere's Construction & Forestry Division.

\* In India we exclusively offer our product brands WIRTGEN, VÖGELE, HAMM and KLEEMANN.

# SUSTAINABLE ACTION.

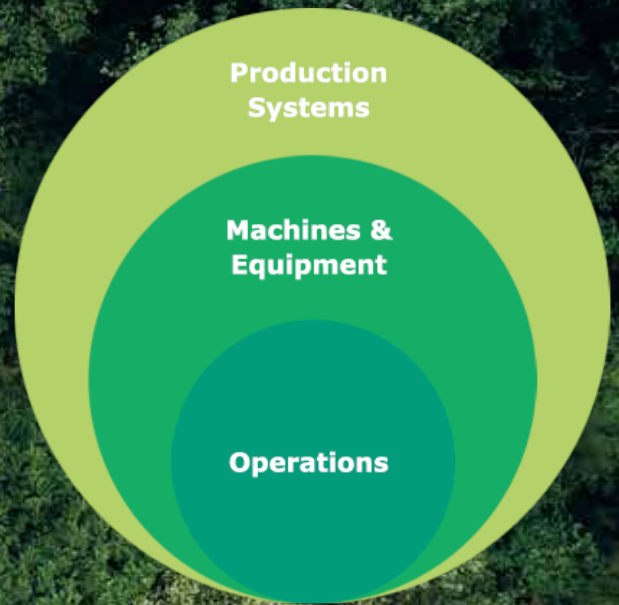

OUR FIELDS OF ACTION

WE ARE AWARE OF OUR RESPONSIBILITY AND ARE MOVING FORWARD CONSCIENTIOUSLY. OUR PLANS FORESEE A SIGNIFICANT REDUCTION OF OUR ECOLOGICAL FOOTPRINT BY 2030:

- > 50% LOWER OPERATIONAL CO<sub>2</sub>E EMISSIONS (SCOPE 1 AND 2)
- > 30% LOWER UPSTREAM AND DOWNSTREAM CO<sub>2</sub>E EMISSIONS (SCOPE 3)

WE UTILIZE THE INTERNATIONALLY RECOGNIZED GREENHOUSE GAS PROTOCOL STANDARD FOR THE ACCOUNTING OF OUR CO<sub>2</sub>E EMISSIONS.

## SUSTAINABLE OPERATION

The strict environmental standards already implemented at all WIRTGEN GROUP factories protect our employees and the environment. These include, above all, energy saving concepts such as the use of geothermal energy for heating, closed-loop water cycles for reducing fresh water consumption, and noise mitigation solutions for the protection of our employees. In the future, all WIRTGEN GROUP factories will work in accordance with the strict standards defined in ISO 14001. And we strongly invest in photovoltaic solutions for emission-free production of electricity.

## MACHINES & EQUIPMENT

The efficiency of our machines and solutions is decisive for ensuring that our customers can work cost-effectively on their project sites. Digital assistance systems, the use of alternative fuels, and new drive train technologies further reduce carbon emissions.

For instance, our first series of battery-powered electric tandem rollers fulfills the demand for local zero-emission operations. If required, and assuming the availability of an electric power source, the Pro series crushers can be used for the purely electric recycling of stone and building rubble.

## PRODUCTION SYSTEMS

Our production systems enable greater sustainability in road construction by optimal combination of machines and special processes. For example, in the case of cold recycling, the asphalt layers removed are recycled and reused in situ. This reduces the need for new materials and a large proportion of the otherwise necessary transportation. This can reduce CO<sub>2</sub> emissions by up to 60 percent. Digital connectivity across entire construction sites is the next step towards further optimization of jobsite efficiency and conscious utilization of resources.

> A 850 KwP solar plant is delivering electricity for our Pune factory since October 2023.



> From 2024 all of our factories will operate in compliance with ISO 14001 certified environmental management systems.



WIRTGEN only lives up to its promise when our customers achieve a competitive edge with our groundbreaking products and technologies. We view ourselves as a reliable partner to our customers.



KLEEMANN combines maximum reliability and state-of-the-art technology with outstanding application expertise.

Quality and innovative strength make VÖGELE the world's leading manufacturer of road pavers. With our modern machines and technologies, our customers are always one step ahead in the highly competitive market!



**WIRTGEN  
GROUP**



HAMM is synonymous with innovative compaction technology. To us innovation means that we combine the highest standards of cost-effectiveness with a forward-looking approach to designing the workplace on the job site.





To our employees „Close to our customers“ is more than a motto - it's a promise they strive to fulfill every day. With passion and know-how, our experienced team ensures a broad range of services that are tailored to the customers' individual requirements - be it in road constructions or the mining and processing of pay minerals. Here, at WIRTGEN INDIA, the delivery of a machine marks the beginning of a long-standing service partnership. This is why we consider ourselves to be more than just a machine supplier. Our team of service experts is always on hand to answer our customers' questions - short response times and fast solutions guaranteed.

#### PRODUCTS THAT PROMISE SUCCESS

With our market leading products and highly developed quality standards we offer the security our customers need to head for success in a harsh competitive environment. Our products are specifically developed to meet the needs of the Indian market. Only the most advanced production processes and ingenious systems are applied

# STRONG IN INDIA



> Whether you are using machines from WIRTGEN, VÖGELE, HAMM or KLEEMANN - the delivery of a machine marks the beginning of a long-standing service partnership.



in our factory in Pune to guarantee top quality. German engineering and quality awareness are our benchmarks. By maintaining a local supply chain we ensure that our machines are manufactured cost-efficiently. This is why our customers profit in two respects. Not only do we deliver solutions that meet the market's needs, but we deliver them at fair prices. With this long-standing tradition, products from WIRTGEN, VÖGELE, HAMM and KLEEMANN ensure our customers' satisfaction and success.

### WELL POSITIONED WITH A DENSE SALES NETWORK

Our professional sales and service network offers an on-site presence which is renowned for customer-oriented solutions. Moreover, with several sales and service locations across India, an excellent supply of service is assured. Our locally based experts can also count on additional support from the brand headquarters in Germany and can hence always offer our customers the highest level of expertise.



**A RELIABLE LOCAL PARTNER IS AN EXTREMELY VALUABLE ASSET. IN ADDITION TO INDIVIDUALLY TAILORED SERVICES, WIRTGEN INDIA OFFERS SOLUTIONS FOR ALL AREAS OF ROAD CONSTRUCTION, AS WELL AS THE MINING AND PROCESSING OF MINERALS.**




*> On the job site or in the workshop: our service is right where you need it.*



CLOSER TO OUR CUSTOMERS WITH

# WIRTGEN SARATHI

OUR CUSTOMER SUPPORT CENTER

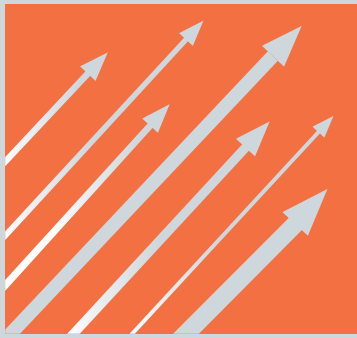

CUSTOMER SUPPORT CENTER  
TOLL FREE NUMBER:

# 1800-267-2600

- > **ONSITE SERVICE SUPPORT:** Connect with our skilled site engineers responsible for servicing your Wirtgen machines, ensuring optimal performance.
- > **NEW MACHINE ENQUIRIES:** Discover the latest innovations and features of our state-of-the-art machines with our knowledgeable support team.
- > **SPARE PARTS REQUIREMENTS:** Swiftly address your spare parts needs and get expert advice on genuine Wirtgen components.
- > **ORDER STATUS UPDATES:** Stay informed about the status of your ordered parts, and experience transparency in the delivery process.
- > **LOGISTICS UPDATES:** Receive real-time updates on logistics, ensuring a smooth flow of operations for your projects.

- > **ANNUAL MAINTENANCE ENQUIRIES:** Plan and schedule annual maintenance for your machines with ease, ensuring longevity and peak performance.
- > **CUSTOMER FEEDBACK:** Your opinion matters! Share your valuable feedback on our machines or any other aspect of our services.
- > **GENERAL ENQUIRIES:** Have questions? Our team is here to assist you with any general queries, providing comprehensive information.



Scan here to visit the Sarathi mobile application

## Performance you can Count on! Quality you can trust!

# PREOWNED MACHINES



Find used equipment for sale at WIRTGEN GROUP locations in India. Quick and easy - select a brand or use the search box below to find construction machinery, systems and components in good condition worldwide!



Wirtgen Group Certified

Assured Quality

Assured Sales & Service Support

Low Cost of Ownership

Ease of Finance



## Connected Machines. Smart Tracking.



Know Where Your  
Machine Is



Track Working  
Hours



Check Machine's  
Critical Functional Data



Get Smart  
Maintenance Alerts



Right Service At  
The Right Time



### EXPERT ASSIST / CONNECTED SUPPORT

WIRTGEN GROUP's Expert Assist provides reliable, smart telemaintenance solutions, ensuring our experts are present with you even when they can't be on-site. Through browser-based access, AR tools, call recording, and AI summaries, the platform supports machine operating issues, fault and malfunction troubleshooting, and complete case documentation.

By bringing customers, operators, field engineers, and technical experts into a single real-time session, Expert Assist enables faster diagnostics and reduced machine downtime.




Scan the QR to visit the  
web-based application



Scan the QR to visit the  
mobile-based application

[operationscenter.deere.com](https://operationscenter.deere.com)



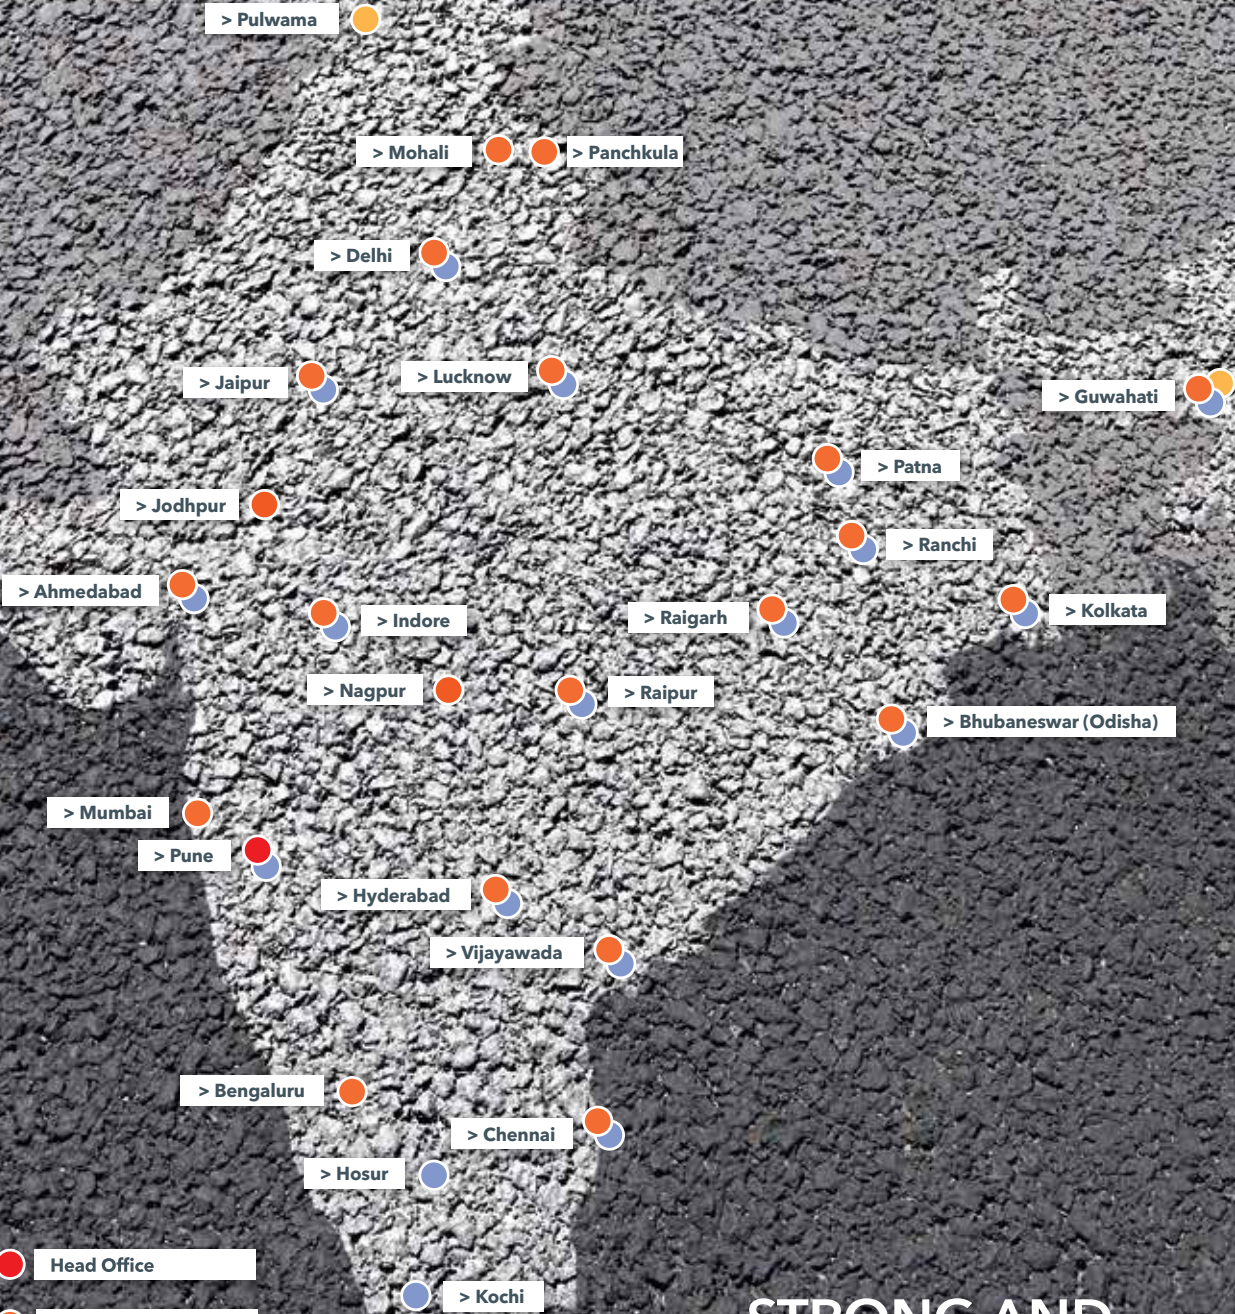

**STRONG AND CONVINCING PRESENCE IN INDIA.**

# MILLING MACHINES FROM THE GLOBAL MARKET LEADER – DESIGNED FOR MAXIMUM PERFORMANCE.

THE WORLD'S ROADS MUST MEET EVER-INCREASING DEMANDS. OUR INNOVATIVE AND STATE-OF-THE-ART MILLING TECHNOLOGY HELPS ENSURE THAT ROAD REHABILITATION PROJECTS ARE BOTH COST-EFFECTIVE AND ENVIRONMENTALLY FRIENDLY. WE ARE THE ENGINE DRIVING CONTINUOUS ADVANCEMENT IN THE INDUSTRY.



> Large milling machines are ideal for the rapid completion of large-scale milling jobs.

## COLD MILLING MACHINES

WIRTGEN cold milling machines cost-effectively remove damaged road pavements. Their range of applications

extends from the removal of entire roadway structures and spot repairs to milling trenches.

### Small Milling Machines



| Model    | Milling Width | Milling Depth | Engine Power  | Operating Weight* |
|----------|---------------|---------------|---------------|-------------------|
| W 55 HR  | 500 mm        | 0-180 mm      | 86 kW/115 HP  | 6,800 kg          |
| W 100 HR | 1,000 mm      | 0-200 mm      | 155 kW/211 HP | 13,600 kg         |
| W 130 HR | 1,300 mm      | 0-200 mm      | 155 kW/211 HP | 14,100 kg         |

### Compact Milling Machines



| Model    | Milling Width | Milling Depth | Engine Power  | Operating Weight* |
|----------|---------------|---------------|---------------|-------------------|
| W 155 CF | 1,500 mm      | 0-330 mm      | 276 kW/375 HP | 20,650 kg         |
| W 185 CF | 1,900 mm      | 0-330 mm      | 276 kW/375 HP | 21,000 kg         |

### Large Milling Machines



| Model   | Milling Width | Milling Depth | Engine Power  | Operating Weight* |
|---------|---------------|---------------|---------------|-------------------|
| W 200 P | 2,000 mm      | 0-330 mm      | 455 kW/610 HP | 32,270 kg         |

\* Weight of machine, half weight of all operating agents, on-board tools, machine operator, no optional equipment features

# COLD RECYCLERS AND SOIL STABILIZERS

WIRTGEN cold recyclers remove the existing road pavement via milling and mix binding agents like foamed bitumen into the granulated pavement.

During soil stabilization, the soil stabilizers mix stabilizing agents such as lime or cement into the moist soil to increase its bearing capacity.

## Cold Recyclers and Soil Stabilizers



| Model    | Working Width | Working Depth | Engine Power  | Operating Weight** |
|----------|---------------|---------------|---------------|--------------------|
| WR 200 X | 2,000 mm      | 0-500 mm      | 315 kW/428 HP | 24,200 kg          |
| WR 240 X | 2,400 mm      | 0-510 mm      | 455 kW/619 HP | 30,000 kg          |
| WR 250 X | 2,400 mm      | 0-560 mm      | 571 kW/777 HP | 31,700 kg          |

## Rock Crusher



| Model   | Working Width | Working Depth | Engine Power  | Operating Weight** |
|---------|---------------|---------------|---------------|--------------------|
| WRC 240 | 2,320 mm      | 0-510 mm      | 455 kW/610 HP | 33,700 kg          |

## Cold Recyclers



| Model    | Working Width | Working Depth* | Engine Power  | Operating Weight** |
|----------|---------------|----------------|---------------|--------------------|
| W 240 CR | 2,350 mm      | 0-350 mm       | 708 kW/963 HP | 48,500 kg          |
| W 380 CR | 3,800 mm      | 0-350 mm       | 708 kW/963 HP | 53,000 kg          |

## Mobile Cold Recycling Mixing Plants



| Model   | Max. Mixing Capacity | Design             | Operating Weight** |
|---------|----------------------|--------------------|--------------------|
| KMA 240 | 240 t/h              | Twin-shaft pugmill | 31,650 kg          |

\* The maximum working depth may deviate from the value indicated due to tolerances and wear

\*\* Weight of machine, half weight of all operating agents, on-board tools, machine operator, no optional equipment features

### Ancillary Equipment for Cold Recycling and Soil Stabilization



| Name                                  | Model    | Mixing Capacity     | Own weight |
|---------------------------------------|----------|---------------------|------------|
| Laboratory-scale twin-shaft pugmill   | WLM 30   | 30 kg               | 220 kg     |
| Name                                  | Model    | Bitumen Temperature | Own weight |
| Laboratory-scale foamed bitumen plant | WLB 10 S | 140-200°C           | 270 kg     |
| Name                                  | Model    | Impact energy, max. | Own weight |
| Laboratory compactor                  | WLV 1    | 23 J                | 170 kg     |

## BINDING AGENT SPREADERS FROM OUR SYSTEM PARTNER STREUMASTER



In cooperation with Streumaster, we offer a comprehensive range of spreaders for use with WIRTGEN soil stabilizers, either as tractor-towed or truck-mounted versions.

### Truck-Mounted Spreaders



| Model     | Container Capacity | Working Width | Spread.quan. 2 km/h   | Own weight * |
|-----------|--------------------|---------------|-----------------------|--------------|
| SW 318 MC | 18 m <sup>3</sup>  | 2,360 mm      | 1-60 l/m <sup>2</sup> | 4,600 kg     |

\* Base machine without additional equipment

# SLIPFORM PAVERS

Slipform pavers from WIRTGEN pave heavy-duty, durable concrete pavements and other traffic surfaces as well as monolithic concrete profiles in a continuous process.

## Offset Slipform Pavers



| Model | Max. mould width | Max. mould height | Engine Power  | Operating Weight** |
|-------|------------------|-------------------|---------------|--------------------|
| SP 15 | 1,800 mm offset  | 1,300 mm offset   | 92 kW/125 HP  | 10,350 kg          |
| SP 20 | 2,500 mm offset  | 2,000 mm offset   | 118 kW/160 HP | 13,900 kg          |
| SP 25 | 2,500 mm offset  | 2,000 mm offset   | 118 kW/160 HP | 13,600 kg          |
| SP 33 | 2200 mm offset   | 1,300 mm offset   | 92 kW/123 HP  | 10000-17000 kg     |

## Inset Slipform Pavers



| Model  | Paving width    | Layer thickness | Engine Power  | Operating Weight** |
|--------|-----------------|-----------------|---------------|--------------------|
| SP 62  | 3,500-7,500 mm  | 0-450 mm        | 155 kW/211 HP | 24,000-34,000 kg   |
| SP 64  | 2,000-7,500 mm  | 0-450 mm        | 155 kW/211 HP | 17,000-45,000 kg   |
| SP 94  | 3,500-9,500 mm  | 450 mm          | 224 kW/305 HP | 24,000-65,000 kg   |
| SP 124 | 4,500-12,000 mm | 0-450 mm        | 272 kW/370 HP | 56,000-102,000 kg  |
| SP 164 | 5,000-16,000 mm | 0-450 mm        | 321 kW/436 PS | 140,000 kg         |

## Texture Curing Machines



| Model   | Max. Working Width | Max. Working Height | Engine Power | Operating Weight*** |
|---------|--------------------|---------------------|--------------|---------------------|
| TCM 180 | 18,000 mm          | 500 mm              | 441 kW/56 HP | 9,100-18,400 kg     |

## Placer/Spreaders



| Model  | Working Width**** | Working height | Engine Power  | Operating Weight* |
|--------|-------------------|----------------|---------------|-------------------|
| WPS 62 | 4,000-7,500 mm    | 0-500 mm       | 155 kW/211 HP | 35,000 kg         |

\* Weight of machine, half weight of all operating agents, on-board tools, machine operator, no optional equipment features

\*\* Weight specifications depend on the installed equipment and paving width

\*\*\* Base machine (WWN 152853) including coolants, lubricants, and hydraulic fluid, with half-filled water tank, half-filled fuel tank, operator, on-board tools, without additional options, with belt conveyor

\*\*\*\* Special paving widths, paving heights and other options available on request

## SURFACE MINERS

WIRTGEN surface miners cut up, crush, and load rock in a single operation – without drilling and blasting. This considerably increases the open-cast deposits' degree of

exploitation. Surface miners are also used to cut routes or lower tunnel floors.

| Surface Miners  |            |               |               |                   |                   |
|---|------------|---------------|---------------|-------------------|-------------------|
|   | Model      | Cutting Width | Cutting Depth | Engine Power      | Operating Weight* |
|  | 220 SM     | 2,200 mm      | 0-300 mm      | 708 kW/963 HP     | 53,150 kg         |
|   | 220 SM 3.8 | 3,800 mm      | 0-350 mm      | 708 kW/963 HP     | 58,050 kg         |
|   | 280 SM     | 2,750 mm      | 0-650 mm      | 783 kW/1,065 HP   | 115,650 kg        |
|   | 260 SX     | 2,750 mm      | 0-650 mm      | 783 kW/1,065 HP   | 101.950 kg        |
|   | 4200 SM    | 4,200 mm      | 0-830 mm      | 1,194 kW/1,623 HP | 204,300 kg        |

\* Weight of machine, half weight of all operating agents, on-board tools, machine operator, no optional equipment features

# BEST-IN-CLASS PAVERS: FOR ALL APPLICATIONS.

VÖGELE'S SEAMLESS PRODUCT RANGE IS UNIQUE IN THE INDUSTRY. WHETHER FOR RESIDENTIAL ROADS OR HIGHWAYS, AIRPORTS OR RACETRACKS, NEW CONSTRUCTION OR REHABILITATION, THICK OR THIN, HOT OR COLD - CUSTOMERS WILL FIND THE RIGHT MACHINE IN OUR RANGE OF PAVERS FOR EVERY ROAD CONSTRUCTION JOB.



> VÖGELE SUPER 1400i:  
Low emissions, low  
noise - economical  
and powerful.

## UNIVERSAL CLASS

Versatile and powerful: the extremely wide range of applications is the most striking feature of pavers in the Universal Class. They handle motorway projects just as well as round-

abouts, also because they can be combined with VÖGELE high-compaction technology.

### Universal Class



| Model       | Max. Paving Width* | Paving Capacity | Engine Power  | Operating Weight** |
|-------------|--------------------|-----------------|---------------|--------------------|
| SUPER 1400i | 7.5 m              | up to 600 t/h   | 110 kW/148 HP | 16,500 kg          |

## HIGHWAY CLASS

Far and wide: the VÖGELE pavers of the Highway Class are perfectly at home on motorways and handling other demanding large-scale projects. Immense pave widths and

laydown rates, the possibility of using high compaction technology and plenty of power are all part of the package with these pavers.

### Highway Class



| Model            | Max. Paving Width* | Paving Capacity | Engine Power  | Operating Weight** |
|------------------|--------------------|-----------------|---------------|--------------------|
| SUPER 1900-3 (G) | 9.2 m              | up to 1,000 t/h | 145 kW/195 HP | 20,580 kg          |
| SUPER 1900-3 (P) | 10 m               | up to 1,000 t/h | 145 kW/195 HP | 21,330 kg          |
| SUPER 1900-5i    | 11.5 m             | up to 900 t/h   | 149 kW/200 HP | 22,400 kg          |
| SUPER 2100-5X    | 14 m               | up to 1,100 t/h | 187 kW/251 HP | 23,300 kg          |
| SUPER 3000-3i    | 18 m               | up to 1,800 t/h | 354 kW/475 HP | 31,800 kg          |

\* The maximum working width is limited by pave speed, type of material, layer thickness, material feed and site conditions

\*\* Operating weight of pavers is with basic width of the screed

## SPECIAL CLASS

That special something: the Special Class comprises machines for specific applications, such as a spray paver for paving thin overlay "hot on hot" or InLine Pave machine

technology for the construction of compact asphalt pavements. This also includes material feeders for the uninterrupted and non-contacting transfer of mix.

### Special Class



| Model                  | Max. Paving Width* | Paving Capacity | Engine Power  | Operating Weight** |
|------------------------|--------------------|-----------------|---------------|--------------------|
| SUPER 1800-3i SprayJet | 6 m                | up to 700 t/h   | 129 kW/173 HP | 22,420 kg          |
| SUPER 2100-3i IP       | 8.5 m              | up to 1,100 t/h | 186 kW/250 HP | 29,000 kg          |

## POWERFEEDER

A feeder is essential to the economical achievement of consistently high-quality results, especially on large-scale job sites. With the MT 3000-3 Standard PowerFeeder and

the MT 3000-3 Offset PowerFeeder, VÖGELE offers cutting-edge technology that sets standards in modern road construction - both in terms of quality and economic efficiency.

### PowerFeeder Series



| Model            | Operating speed | Conveying System Capacity | Engine Power  | Weight    |
|------------------|-----------------|---------------------------|---------------|-----------|
| MT 3000-3 Offset | 25 m/min        | up to 1,200 t/h           | 142 kW/190 HP | 24,185 kg |

\* The maximum working width is limited by pave speed, type of material, layer thickness, material feed and site conditions

\*\* Operating weight of pavers is with basic width of the screed



> Left:  
 Combined with the cutting-edge AB 480 TV Extending Screed, the SUPER 1400i is capable of building high-quality pavements in varying widths up to 7.5 m through the addition of bolt-on extensions.

Bottom:  
 The large and sturdy material hopper of the SUPER 1400i holds 13 t. Thanks to the low and wide hopper sides, feeding the paver with mix is a fast and easy process.



# THE HAMM PRODUCT RANGE: THE RIGHT SOLUTION FOR EVERY CHALLENGE.

HAMM'S PRODUCT RANGE COMPRISES STATE-OF-THE-ART MACHINES FROM 9 T - 11 T FOR ROAD CONSTRUCTION AND EARTHWORKS. THE MACHINES STAND OUT FOR THEIR EASE OF OPERATION, OUTSTANDING PRODUCTIVITY, AND RELIABILITY. WITH ITS EXTENSIVE PRODUCT PORTFOLIO, A WEALTH OF OPTIONS, AS WELL AS INNOVATIVE TECHNOLOGIES, HAMM COVERS THE MOST DIVERSE APPLICATIONS AND MEETS CUSTOMER REQUIREMENTS ALL OVER THE WORLD.



> HAMM HC 119i: 3-point articulation for even weight distribution and excellent on-centre feel.

## HD SERIES OF ARTICULATED TANDEM ROLLERS

The HD series of rollers is perfectly suited for paving large asphalt surfaces and for road construction. They ensure high compaction quality due to large drum diametres and

its three-point articulation. In addition they offer the operator a high degree of comfort and visibility.

### HD Series of articulated tandem rollers



| Model       | Weight Class | Drum Width | Engine Power          |
|-------------|--------------|------------|-----------------------|
| HD 12B G VV | 2 t          | 1,200 mm   | 18,2kW/24,8HP/2200RPM |
| HD 99i VV   | 9 t          | 1,680 mm   | 55kW/74HP/2200RPM     |
| HD 109i VV  | 10 t         | 1,680 mm   | 55kW/74HP/2200RPM     |

## HC SERIES OF SOIL COMPACTORS

The soil compactors of the HC Series are characterized by high compaction performance, great gradeability, a

high level of comfort, outstanding visibility and excellent ergonomics.

### HC Series of soil compactors



| Model     | Weight Class | Drum Width | Engine Power         |
|-----------|--------------|------------|----------------------|
| HC 100    | 10 t         | 2,140 mm   | 55kW/74HP/2200RPM    |
| HC 119i   | 11 t         | 2,140 mm   | 74kW/99,2HP/2200RPM  |
| HC 119i D | 11 t         | 2,140 mm   | 74kW/99,2HP/2200RPM  |
| HC 139i D | 13 t         | 2,140 mm   | 95,6kW/128HP/2200RPM |

\* VV = 2 Vibrating drums

\*\* V = Vibrating drum

\*\*\* P = Padfoot shells

# CRUSHERS AND SCREENING PLANTS FOR PROFESSIONAL ROCK PROCESSING.

CRUSHED AGGREGATE IS NEEDED AS A RAW MATERIAL FOR CONSTRUCTION AND CIVIL ENGINEERING PROJECTS. KLEEMANN'S CRUSHERS AND SCREENING PLANTS TRANSFORM UNWIELDY BOULDERS INTO AGGREGATE OF PREDETERMINED GRAIN SIZE. THE ROBUST MACHINES CAN ALSO PROCESS RECYCLED MATERIAL FOR THE CONSTRUCTION INDUSTRY OR ARE USED TO PROCESS RAW MATERIALS IN THE MINING INDUSTRY.



> Intelligent line coupling ensures an optimum flow of material through several crushing stages: coupled jaw crusher, cone crusher, and screening plant.



## MOBICAT MOBILE JAW CRUSHERS

The MOBICAT series of tracked mobile jaw crushers stands out for its uncompromising design and robustness. Jaw crushers operate using the principle of pressure crushing.

### MOBICAT Mobile Jaw Crushers



| Model       | Feed Capacity | Crusher Inlet  | Engine Power  | Machine Weight* |
|-------------|---------------|----------------|---------------|-----------------|
| MC 100 EVO  | 220 t/h       | 950 x 550 mm   | 165 kW/221 HP | 31,000 kg       |
| MC 110 EVO2 | 400 t/h       | 1,100 x 700 mm | 248 kW/333 HP | 42,500 kg       |
| MC 120 PRO  | 650 t/h       | 1,200 x 800 mm | 371 kW/498 HP | 72,500 kg       |

## MOBIREX MOBILE IMPACT CRUSHERS

The MOBIREX series of tracked mobile impact crushers is used in soft to medium-hard natural rock and for recycling rubble.

In this process, the material to be crushed collides with a fast-moving rotor, is rapidly accelerated, and propelled against a stationary impact device ("impact plates").

### MOBIREX Mobile Impact Crushers



| Model                      | Feed Capacity | Crusher Inlet  | Engine Power     | Machine Weight* |
|----------------------------|---------------|----------------|------------------|-----------------|
| MR 100 NEO/<br>MR 100 NEOe | 200 t/h       | 1,000 x 750 mm | 240 kW / 322 HP  | 29,500 kg       |
| MR 110 EVO2                | 350 t/h       | 1,100 x 800 mm | 364 kW<br>498 HP | 44,500 kg       |
| MR 130 EVO2                | 450 t/h       | 1,300 x 900 mm | 371 kW<br>498 HP | 49,500 kg       |
| MR 130 PRO                 | 600 t/h       | 1,300 x 900 mm | 480 kW/643 HP    | 64,000 kg       |

\* Minimum weight without additional options, exact weight specifications available on request

\*\* Depending on the respective exhaust emission standard

# MOBICONE MOBILE CONE CRUSHERS

The tracked mobile screening plants can be equipped with the Dual Power option, which allows the machines to be

powered by electricity only. Cone crushers produce the best final cubic grain sizes in the second and third crushing stage.

## MOBICONE Mobile Cone Crushers



| Model       | Feed Capacity | Max. Feed Size | Crusher Diameter | Machine Weight* |
|-------------|---------------|----------------|------------------|-----------------|
| MCO 90 EVO2 | 270 t/h       | 200 mm         | 970 mm           | 33,500 kg       |
| MCO 110 PRO | 470 t/h       | 240 mm         | 1,120 mm         | 49,500 kg       |

# MOBISCREEN MOBILE SCREENING PLANTS

Mobile screening plants are perfect for applications that require high output and when difficult to screen material must be separated. The tracked mobile screening plants

can be equipped with the Dual Power option, which allows the machines to be powered by electricity only.

## MOBISCREEN Mobile Scalping Screen Plants



| Model        | Feed Capacity | Screen Size (w x l) | Engine Power | Machine Weight |
|--------------|---------------|---------------------|--------------|----------------|
| MSS 502 EVO  | 350 t/h       | 1,350 mm x 4,000 mm | 77 kW/103 HP | 26,500 kg      |
| MSS 802 EVO  | 500 t/h       | 1,550 mm x 4,880 mm | 99 kW/133 HP | 32,000 kg      |
| MSS 1102 PRO | 750 t/h       | 1,830 mm x 6,100 mm | 164 kW/      | 39,500 kg      |

## MOBISCREEN Mobile Classifying Screen Plants



| Model       | Feed Capacity | Screen Size (w x l) | Engine Power | Machine Weight*  |
|-------------|---------------|---------------------|--------------|------------------|
| MSC 702 EVO | 350 t/h       | 1,550 x 4,500 mm    | 77 kW/103 HP | 30,500-38,000 kg |
| MSC 703 EVO | 350 t/h       | 1,550 x 4,500 mm    | 77 kW/103 HP | 33,500-41,000 kg |
| MSC 952 EVO | 500 t/h       | 1,550 x 6,100 mm    | 94 kW/126 HP | 33,000-40,500 kg |
| MSC 953 EVO | 500 t/h       | 1,550 x 6,100 mm    | 94 kW/126 HP | 37,000-44,500 kg |

\* Transport weight of basic plant - max configuration (kg), with vibrating grate

## MOBIBELT MOBILE STACKERS

MOBIBELT mobile stackers are used for efficient logistics processes on job sites. The units stand out for their short set-up times as well as their remarkable flexibility and mobility.

### Mobile Stackers - MOBIBELT



| Model  | Feed Capacity      | Drop Height | Belt Length | Machine Weight |
|--------|--------------------|-------------|-------------|----------------|
| MBT 20 | 450 t/h*/600 t/h** | 8,400 mm    | 19,400 mm   | 11,200 kg      |
| MBT 24 | 450 t/h*/600 t/h** | 10,100 mm   | 22,700 mm   | 12,600 kg      |


\* with hydraulic drive  
\*\* with electric drive

*MOBISCREEN screening plants stand out from the rest thanks to their flexibility, excellent transport properties, fast setup times and efficient operation - which all, of course, come with the best performance data.*





# WIRTGEN GROUP

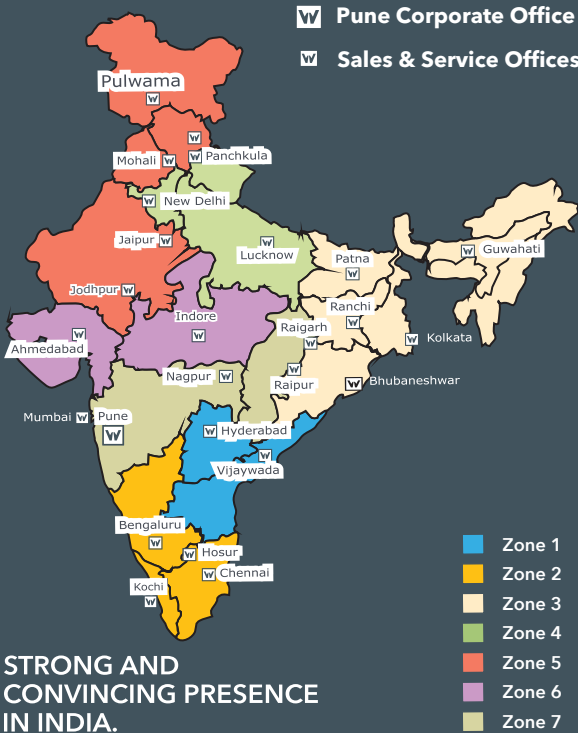

**STRONG AND CONVINCING PRESENCE IN INDIA.**

| Zone   | Sales Support                                     | Customer Support      |
|--|---|-----------------------|
| Zone 1   | Telangana, Andhra Pradesh                         | 9849021920 9849295933 |
| Zone 2   | Karnataka, Tamil Nadu, Kerala                     | 7397733497 9994134260 |
| Zone 3   | West Bengal, Bihar, Jharkhand, Odisha, North East | 9830256734 8585895499 |
| Zone 4   | Uttar Pradesh, NCR, Haryana, Delhi                | 7420050922 7318139555 |
| Zone 5   | Punjab, Himachal Pradesh, J & K, Rajasthan        | 9910176339 9205579379 |
| Zone 6   | Madhya Pradesh, Gujarat                           | 9893027556 7028881895 |
| Zone 7   | Maharashtra, Goa, Chhattisgarh                    | 9987500617 9831357768 |
| Sarathi Customer Care - 1800-267-2600  |   |                       |
| <a href="http://www.wirtgen-group.com/India">www.wirtgen-group.com/India</a> |   |                       |

## WIRTGEN INDIA Pvt. Ltd.

Gat No 301 & 302, Bhandgaon Khor Road, Village Bhandgaon, Taluka - Daund, Dist Pune, 412214, Maharashtra India

Phone: +91 20 67682600 Sarathi Customer Care Number: 1800 267 2600

E-mail: [Sales.india@wirtgen-group.com](mailto:Sales.india@wirtgen-group.com)

[www.wirtgen-group.com](http://www.wirtgen-group.com)



All information and images contained herein are non-binding and may contain optional equipment. Subject to technical changes without notice. Performance figures depend on the operating conditions. The products listed here are only available in their respective sales regions. Please visit [www.wirtgen-group.com](http://www.wirtgen-group.com) to find out whether a particular product is available in your market. © WIRTGEN GROUP Branch of John Deere GmbH & Co. KG. Printed in India.